

REV.	ECN.	NO.	APPD.



A

B

C


D

E

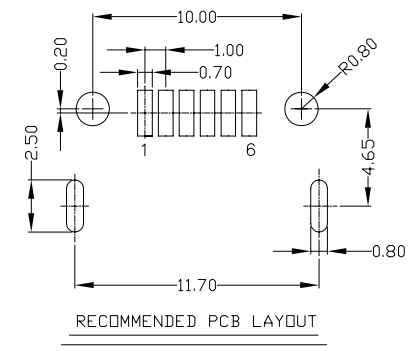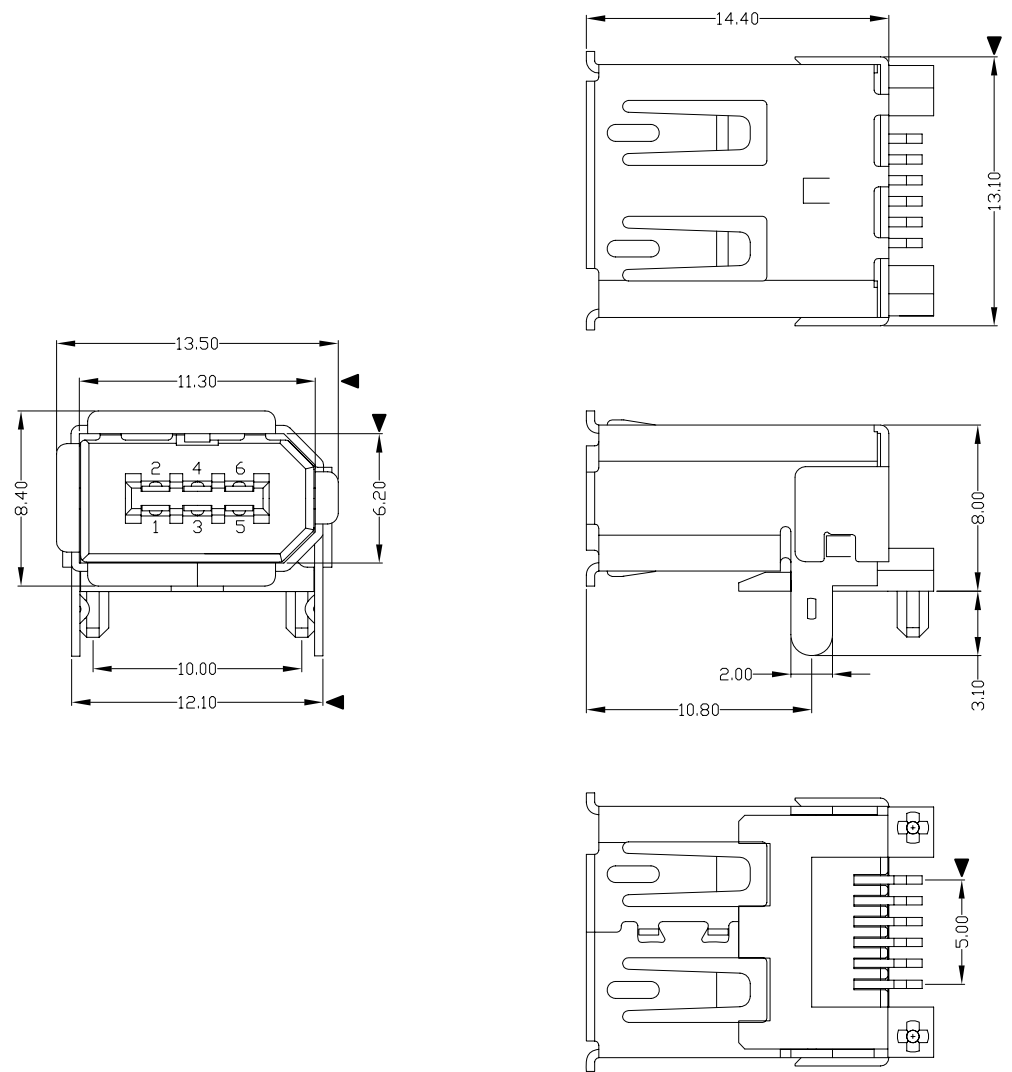

- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 1AMP,30V AC;
    - INSULATION RESISTANCE: 100MΩ MIN;
    - CONTACT RESISTANCE: 50mΩ MAX;
    - WITHSTANDING VOLTAGE: 300V AC;
    - OPERATING TEMPERATURE:-55°C TO +85°C.
  - Mechanical:
    - Mating Force: 30N MAX
    - Unmating Force: 7N MIN.
  - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
  - PART NO.

IENF-06\*N-4\*V80  
 W:WHITE  
 B:BLACK  
 1:Au 1U\*  
 6:Au 30U\*  
 1:PB  
 2:PA6T  
 3:PA9T  
 4:LCP

NO	PARTS	MATERIAL	QTY	FINISHING								
3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS	mm	<b>东莞市腾兴电子有限公司</b>			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX°	MAT'L	SEE NOTE				TITLE:
1	TERMINAL	COPPER ALLOY	6	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	FINISH	SEE NOTE	IEEE 1394 6P/F SMT	IENF-06*N-4*V80		
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.</small>					Q'TY		DR:		<small>gan 2013/01/18</small> <small>gan 2013/01/18</small>		DWG NO.:	
							APPD:		<small>gan 2013/01/18</small>		SCALE SHEET REV. CUSTOMER DRAWING 1:1 1/1 B	