

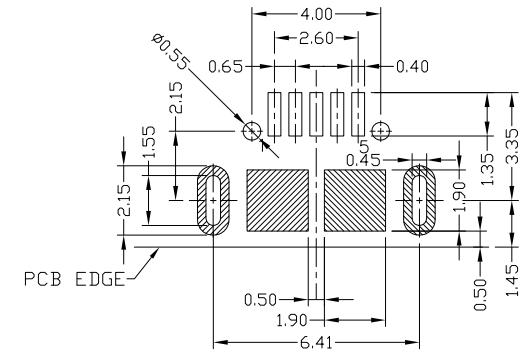
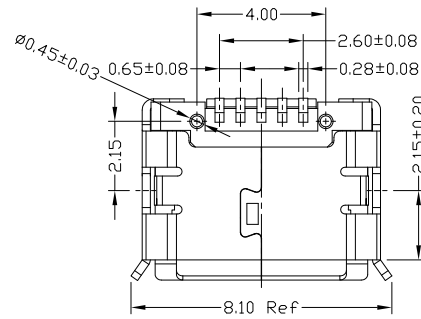






RoHS  
Compliant  
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT

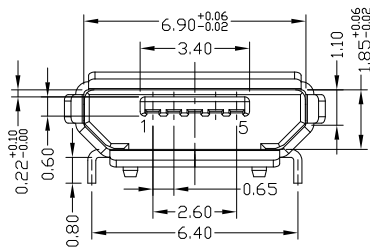

#### NOTES:

##### 1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE:-30°C TO +80°C.

##### 2.Mechanical:

- 1)Mating Force: 35N MAX
- 2)Unmating Force: 10N MIN.

##### 3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

#### 4.PART NO.

MUYF-05\*T-4BHUA030

1:Au 1U\*  
6:Au 30U\*

T:TIN  
N:NICKEL

W:WHITE  
B:BLACK

1:PBT  
2:PA6T  
3:PA9T  
4:LCP

#### Bill of materials:

3	SHELL	COPPER ALLOY	1	PLATED TIN	X. ±0.35	X.* ±2*	UNITS mm	东莞市腾兴电子有限公司				
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X* ±1*	MAT'L					
					SEE NOTE	TITLE: MICRO USB B TYPE F 5P 插板6.4 有脚柱	PART NO.: MUYF-05*T-4BHUA030					
						FINISH	DR: Ricky 2018/5/15	DWG NO.: AII-HUA030				
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX*	SEE NOTE	CHKD: Ricky 2018/5/15	SCALE	SHEET	REV.	CUSTOMER DRAWING
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX*	Q'TY	APPD:	5:1	1/1	A	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							
					