


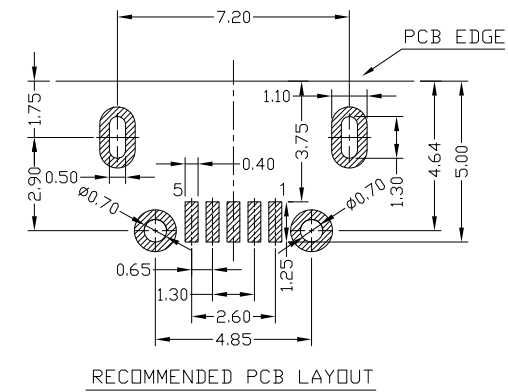




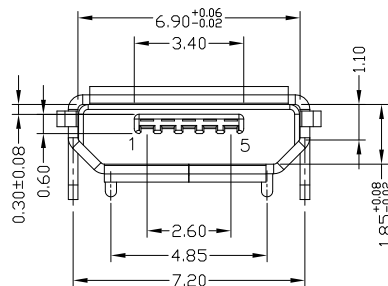

RoHS  
Compliant  
2002/95/EC

Halogen Free

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
|      |      |     |       |
|      |      |     |       |
|      |      |     |       |



NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE:-30°C TO +80°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
- 2)Unmating Force: 10N MIN.

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05\*T-4BHUA409



Bill of materials:

|   |    |          |                                |     |             |  |         |        |          |   |   |
|---|----|----------|--------------------------------|-----|-------------|--|---------|--------|----------|---|---|
| E | 3  | SHELL    | STAINLESS STEEL / COPPER ALLOY | 1   | PLATED TIN  | X. ±0.35   | X.' ±2' | UNITS  | mm       | <b>东莞市腾兴电子有限公司</b><br>TITLE: MIRCO USB B TYPE F 5P<br>四脚全插牛角短针斜后盖0.8版<br>PART NO.: MUYF-05*T-4BHUA409<br>DR: Ricky 2018/4/30<br>DWG NO.: AII-HUA409<br>CHKD: Ricky 2018/4/30<br>APPD: |   |
|   | 2  | HOUSING  | LCP+30%GF                      | 1   | UL94V-0     | .X ±0.30   | .X' ±1' | MAT'L  | SEE NOTE |   |   |
|   | 1  | TERMINAL | COPPER ALLOY                   | 5   | PLATED GOLD | .XX ±0.25  | .XX'    | FINISH | SEE NOTE |   |   |
|   | NO | PARTS    | MATERIAL                       | QTY | FINISHING   | .XXX ±0.15   | .XXX'   | Q'TY   | SEE NOTE |   |   |
|   |    |          |                                |     |             | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDDTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDDTECH INC |         |        |          |   | SCALE: 5:1<br>SHEET: 1/1<br>REV.: A<br>CUSTOMER DRAWING |