

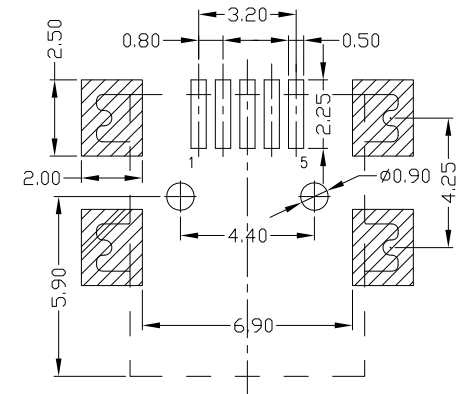

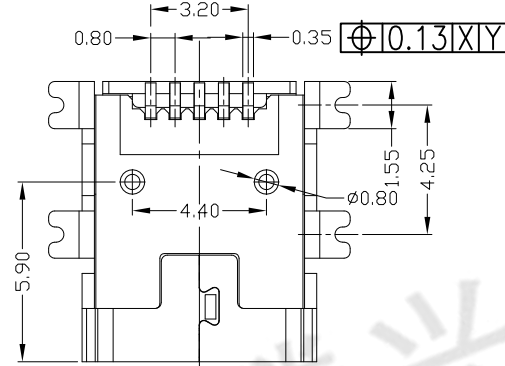



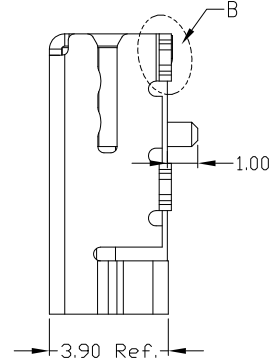


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

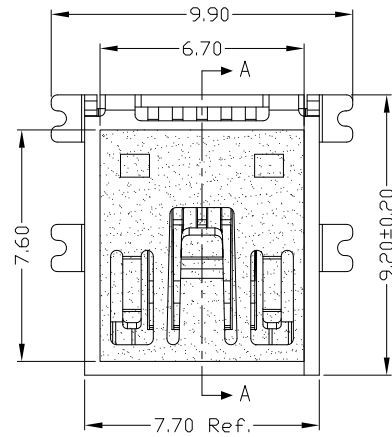

RECOMMENDED P.C.B LAYOUT

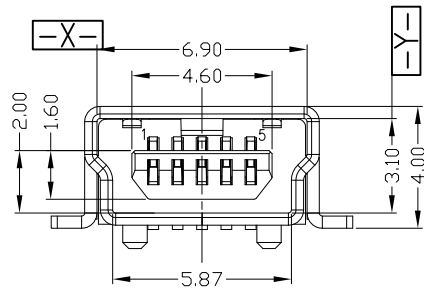


DETAIL B
(2:1)

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE: -25°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUBF-05***T**-4BHUA152-M



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	.X ±0.15	Ang1°	UNITS	mm	东莞市腾兴电子有限公司					
5					.X ±0.15	Ang1°	UNITS	mm	TITLE: MINI USB 5P F SMT B Type 4.25有柱(Post=1.0H)贴麦拉					
4					.XX ±0.10		MAT'L						PART NO.: MUBF-05XT-4BHUA152-M	
3	SHELL	COPPER ALLOY	1	PLATED TIN/NICKEL	.XXX ±0.05		SEE NOTE		DR:	Ricky 2017/10/11	DWG NO.: AII-HUA152			
2	HOUSING	LCP+30%GF	1	UL94V-0			SEE NOTE		CHKD:	Ricky 2017/10/11	SCALE	SHEET	REV.	CUSTOMER
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN			Q'TY		APPD:		4:1	1/1	B	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC