REV	LTR	DESCRIPTION	DATE	REVISER	APPD

Pb Process Capable

RoHS Compliant 2002/95/EC

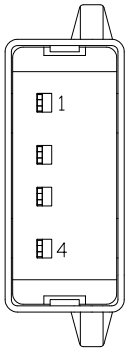

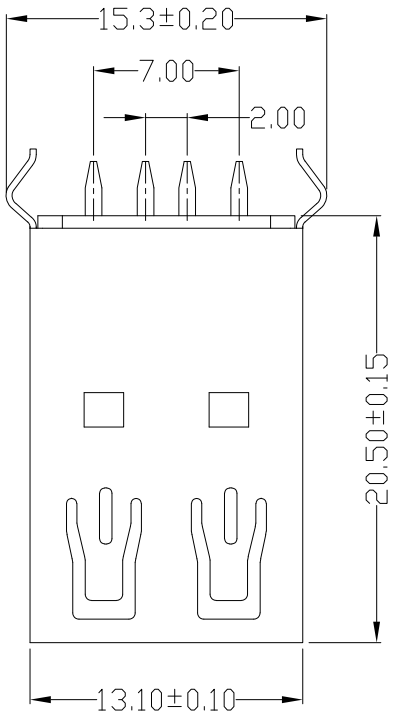

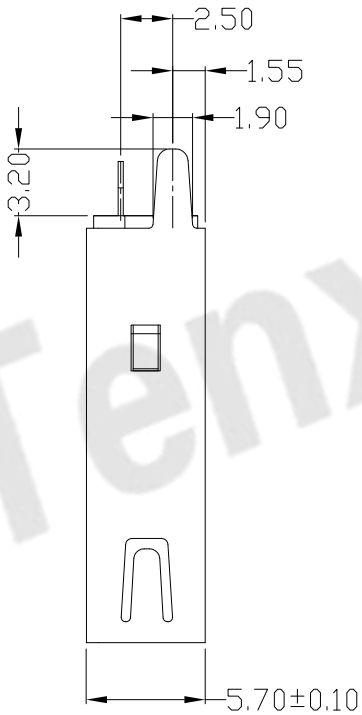

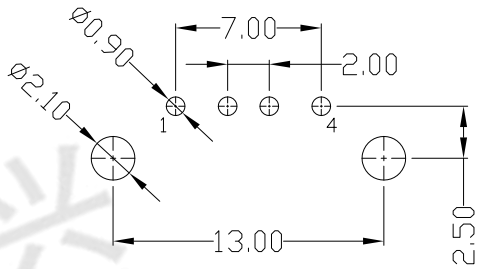

RECOMMENDED PCB LAYOUT

Tenx 腾兴

NOTES:

1. ELECTRICAL:
   1) VOLTAGE CURRENT RATING: 2AMP,30V AC;
   2) INSULATION RESISTANCE: 1000MΩ MIN;
   3) CONTACT RESISTANCE: 30mΩ MAX;
   4) WITHSTANDING VOLTAGE: 500V AC;
   5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
   1) Mating Force: 35N MAX
   2) Unmating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04✱N-1✱PZ211

- 1:Au 1U"
- 6:Au 30U"
- W:WHITE
- B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY / SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

X. ±0.35	X.° ±2°	UNITS mm	东莞市腾兴电子有限公司
.X ±0.3	.X° ±1°	MAT'L SEE NOTE	TITLE: USB AF DIP 180度 全包 无卷边弯脚有后塞 20.5
.XX ±0.25	.XX°		PART NO.: USAF-04XN-1XPZ211
.XXX ±0.15	.XXX°	FINISH SEE NOTE	DR: Ricky 2018/11/22
		Q'TY	CHKD: Ricky 2018/11/22
			APPD:

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC .AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

DWG NO.:			
AII-PZ211			
SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	