

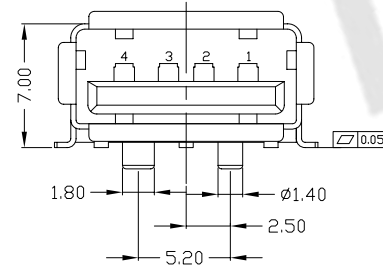
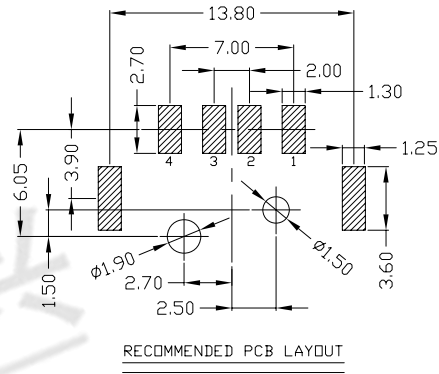


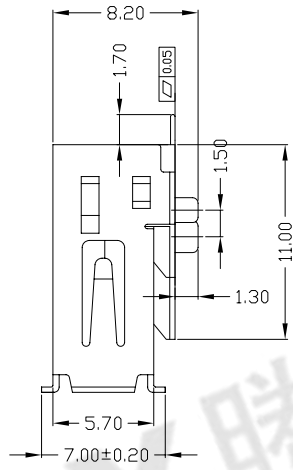

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

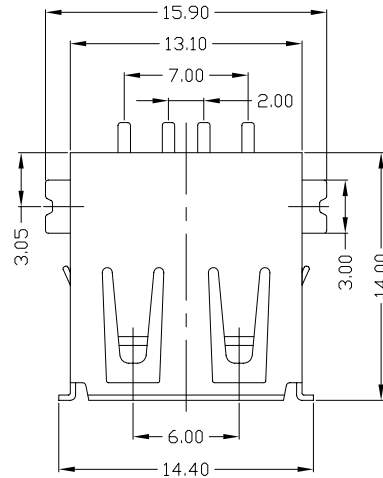

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USAF-04*N-2*V32
W: WHITE
B: BLACK
1Au 1U*
6Au 30U*1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	东莞市腾兴电子有限公司				
					.X ±0.3	.X* ±1*	mm					
3	HOUSING	PA6T+30%GF	1	UL94V-0	.XX ±0.25	.XX*	MAT'L	TITLE: USB AF SMT 贴片反向		PART NO.: USAF-04*N-2*V32		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX*	SEE NOTE	DR: gan 2014/09/20		DWG NO.: AII-V32		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.			FINISH	CHKD: gan 2014/09/20		SCALE SHEET REV. CUSTOMER DRAWING	
NO	PARTS	MATERIAL	QTY	FINISHING				SEE NOTE	Q'TY	APPD:	1:1	1/1