


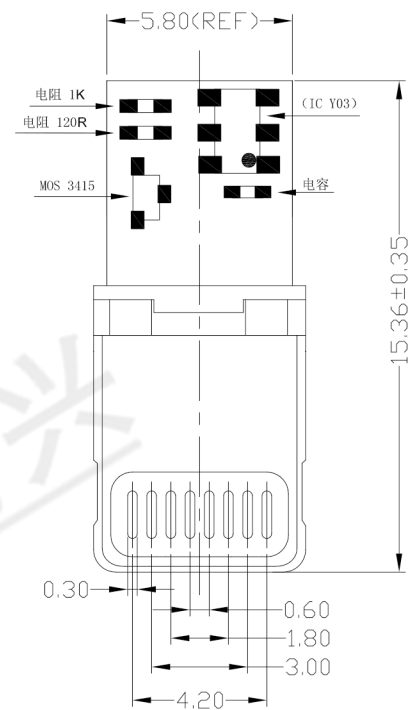


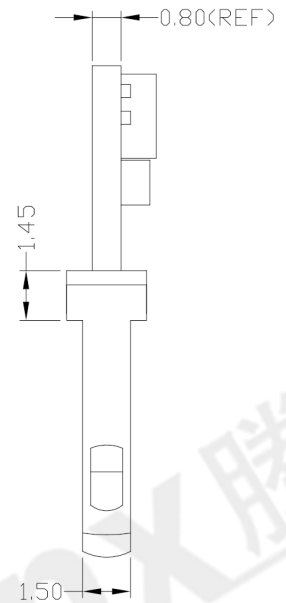

RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

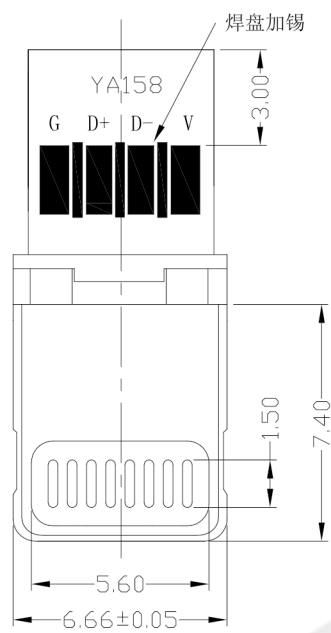

NOTES:

- ELECTRICAL:
 - CURRENT RATING: 2.1A MAX;
 - VOLTAGE RATING: 18V DC(rms) Max.
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 100mΩ MAX;
 - OPERATING TEMPERATURE: -25°C TO +80°C.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

IPNM-082N-9WSU05-P084	W: WHITE B: BLACK
1: Au 1U*	1: PBT
2: Au 3U*	2: PA6T
6: Au 30U*	3: PA9T
	4: LCP
	9: ABS

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	MOLDING	LCP OR ABS	1	UL94V-0
2	SHELL	ZINC ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD

X. ±0.35	X.* ±2'	UNITS	mm
.X ±0.3	.X* ±1'	MAT'L	SEE NOTE
.XX ±0.25	.XX*	FINISH	SEE NOTE
.XXX ±0.15	.XXX*	Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市腾兴电子有限公司

TITLE: iPhone M 8P压铸一体式 方头 PCB长14.88 耐高压	PART NO.: IPNM-082N-9WSU05-P084
DR: gan 2018/05/01	DWG NO.: AII-SU05-P084
CHKD: gan 2018/05/01	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	1:1 1/1 A