




RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

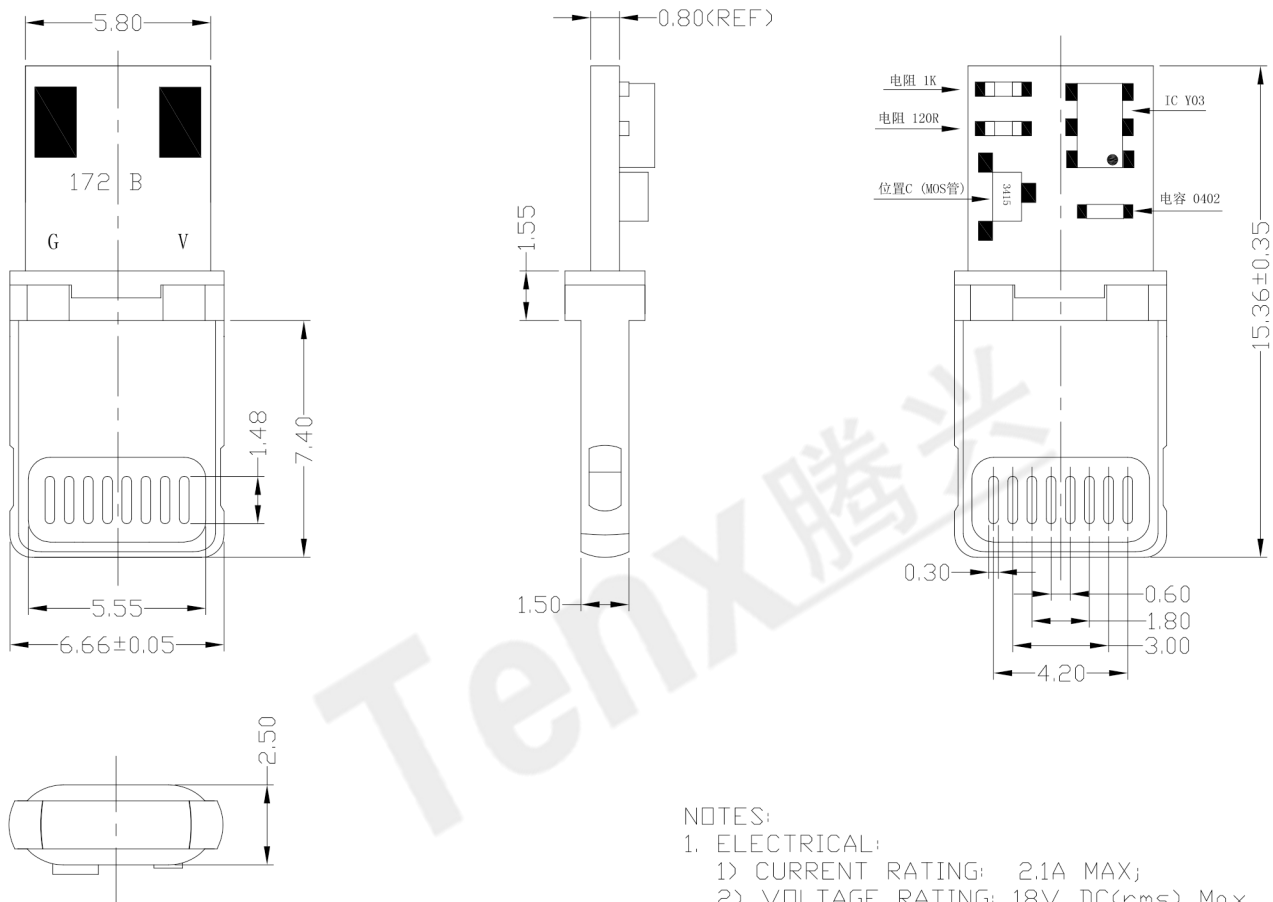

NOTES:

- ELECTRICAL:
  - CURRENT RATING: 2.1A MAX;
  - VOLTAGE RATING: 18V DC(rms) Max.
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 100mΩ MAX;
  - OPERATING TEMPERATURE: -25°C TO +80°C.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

IPNM-082N-9WSU05-P130

- |            |         |
|------------|---------|
| 1: Au 1U"  | 1: PBT  |
| 2: Au 3U"  | 2: PA6T |
| 3: Au 30U" | 3: PA9T |
| 4: LCP     | 4: LCP  |
| 5: ABS     | 5: ABS  |

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市腾兴电子有限公司						
3	MOLDING	LCP OR ABS	1	UL94V-0	X. ±0.35	X.* ±2'	SEE NOTE	TITLE: 8P压铸一体式(方头)(长14.88) 耐高压 充电板		PART NO.: IPNM-082N-9WSU05-P130			
2	SHELL	ZINC ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1'		FINISH	DR: gan 2018/05/01		DWG NO.: AII-SU05-P130		
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD	.XX ±0.25	.XX*		Q'TY	CHKD: gan 2018/05/01		SCALE	SHEET	REV.
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		APPD:		1:1		1/1	A	DRAWING