




**RoHS Compliant**  
2002/95/EC

REV.	ECN.	NO.	APPD.

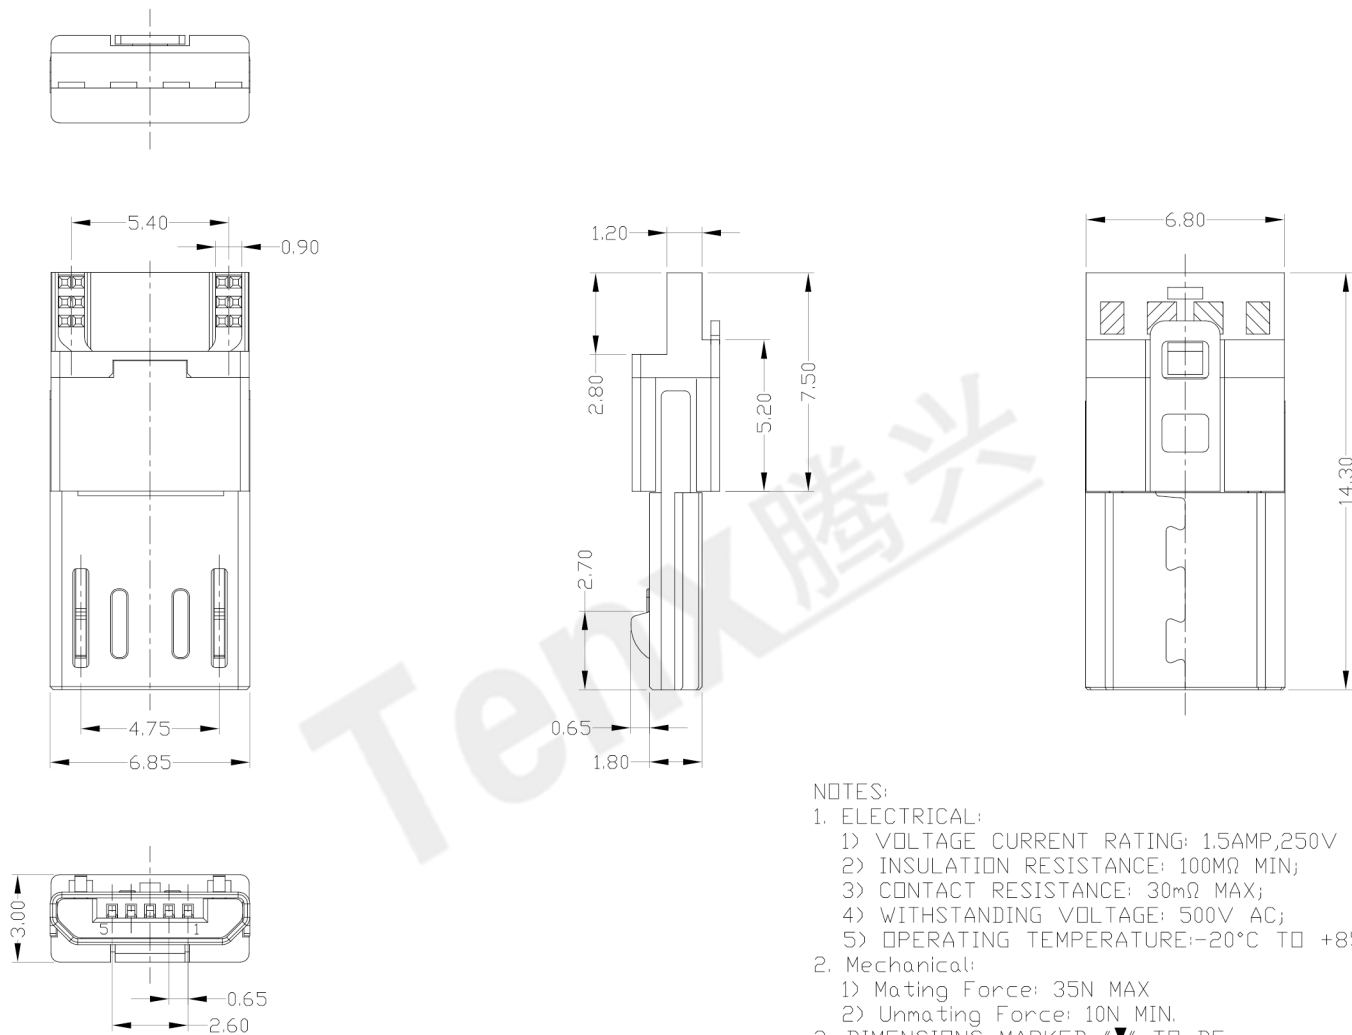

- NOTES:**
- ELECTRICAL:**
    - VOLTAGE CURRENT RATING: 1.5AMP,250V AC;
    - INSULATION RESISTANCE: 100MΩ MIN;
    - CONTACT RESISTANCE: 30mΩ MAX;
    - WITHSTANDING VOLTAGE: 500V AC;
    - OPERATING TEMPERATURE:-20°C TO +85°C.
  - Mechanical:**
    - Mating Force: 35N MAX
    - Umating Force: 10N MIN.
  - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.**

4. PART NO.  
MUYM-05\*N-4BSH110

1:Au 1U\*  
6:Au 30U\*

W:WHITE  
B:BLACK

1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

4	HOOK	STAINLESS STEEL	2		X. ±0.3	X.' ±2'	UNITS	mm	<b>东莞市腾兴电子有限公司</b> TITLE: micro USB 5P公焊线3.0 前五后二 DR: gan 2017/07/27 CHKD: gan 2017/07/27 APPD:	PART NO.: MUYM-05*N-4BSH110 DWG NO.: AII-SH110 SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING
3	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.2	.X' ±1'	MAT'L	SEE NOTE		
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.15	.XX'	FINISH	SEE NOTE		
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.10	.XXX'	Q'TY			
NO	PARTS	MATERIAL	QTY	FINISHING	<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.</small>					