

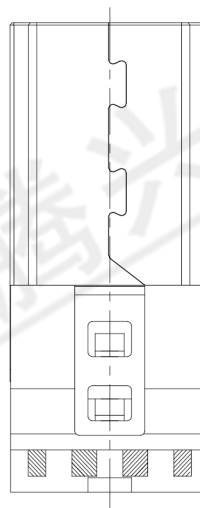
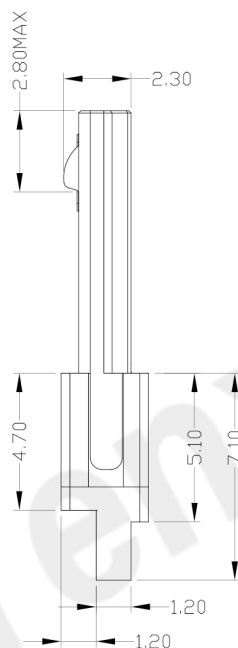



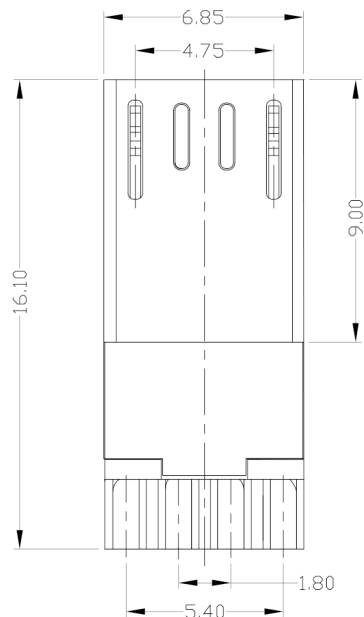


RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

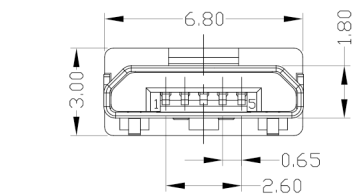

NOTES:

- ELECTRICAL:**
 - VOLTAGE CURRENT RATING: 15AMP,250V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 50V AC;
 - OPERATING TEMPERATURE:-20°C TO +85°C.
- Mechanical:**
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- PART NO.



Bill of materials:

4	HOOK	STAINLESS STEEL/COPPER ALLOY/ SPCC	2	
3	HOUSING	LCP+30%GF	1	UL94V-0
2	SHELL	STAINLESS STEEL/COPPER ALLOY/ SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

X. ±0.3	X.' ±2'	UNITS	mm
.X ±0.2	.X' ±1'	MAT'L	
.XX ±0.15	.XX'	SEE NOTE	
.XXX ±0.10	.XXX'	FINISH	
		SEE NOTE	
		Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

东莞市腾兴电子有限公司			
TITLE: MICRO USB 5P BM 超薄 加长外露		PART NO.: MUYM-05*N-4BSH19	
DR: gan 2018/05/22		DWG NO.: AII-SH19	
CHKD: gan 2018/05/22		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	