




**RoHS Compliant**  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

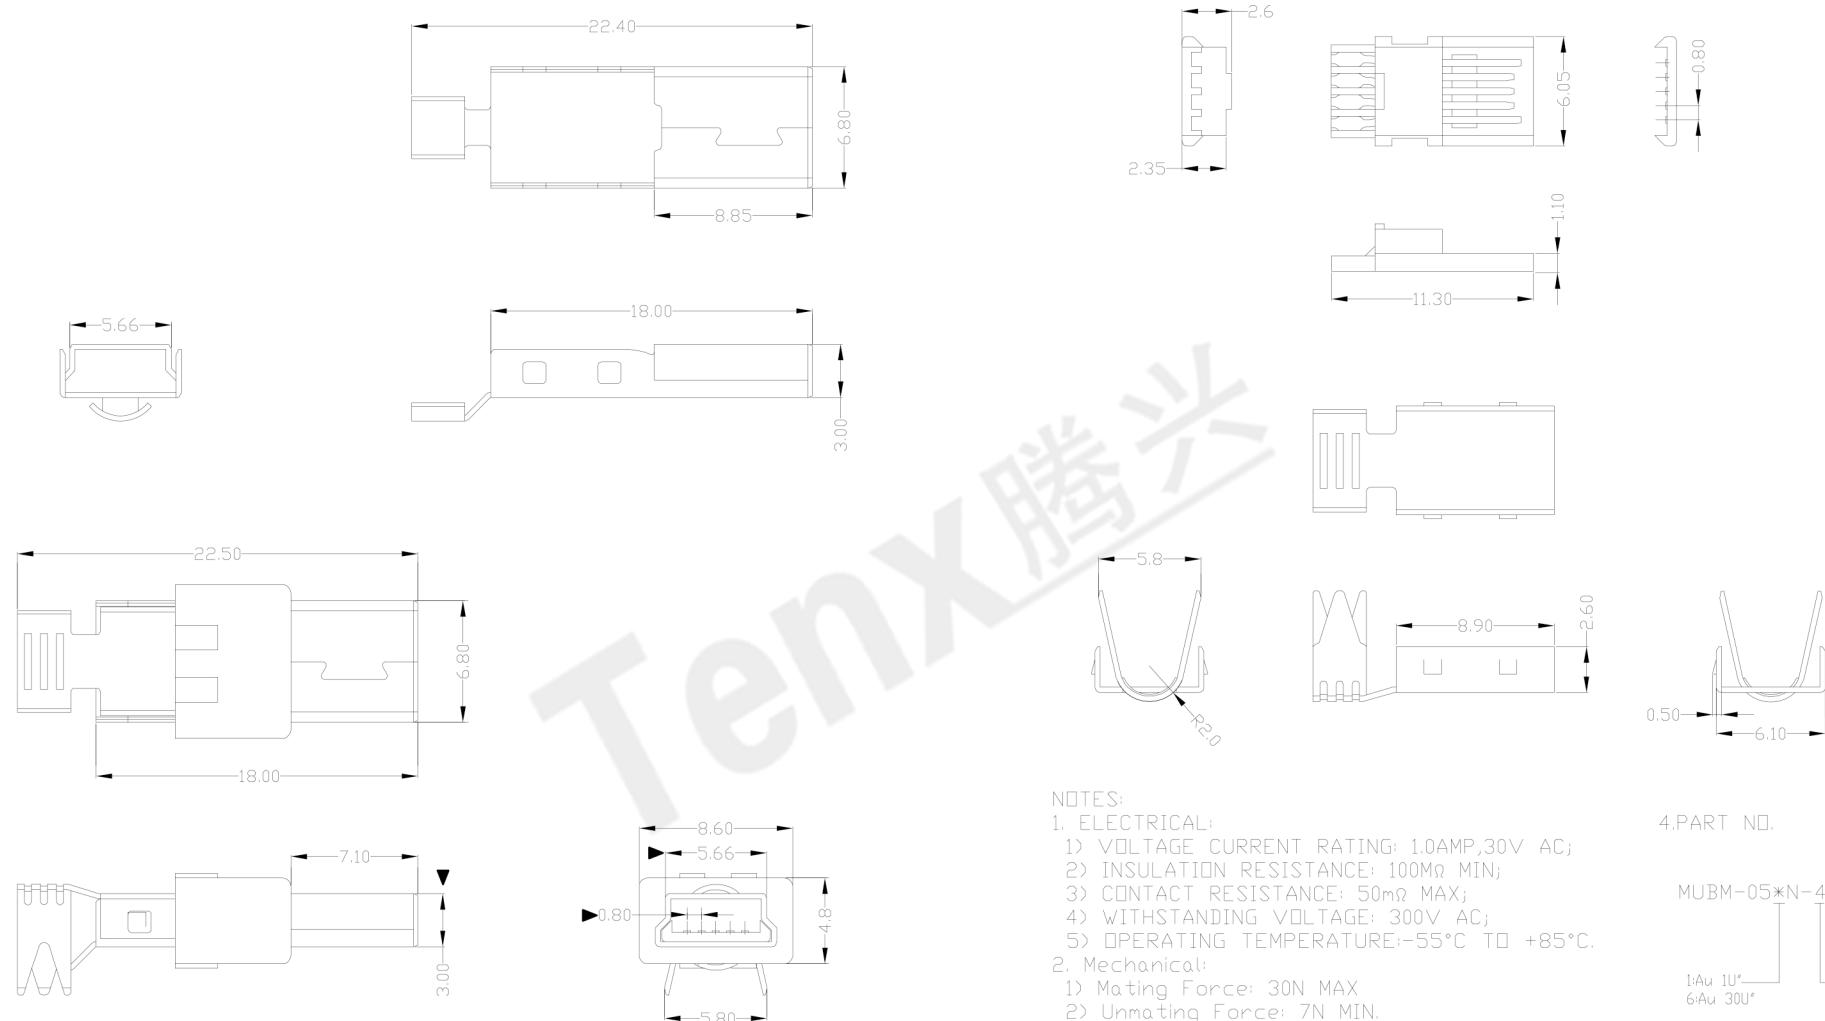

**NOTES:**

- ELECTRICAL:**
  - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 50mΩ MAX;
  - WITHSTANDING VOLTAGE: 300V AC;
  - OPERATING TEMPERATURE:-55°C TO +85°C.
- Mechanical:**
  - Mating Force: 30N MAX
  - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.  
MUBM-05\*N-4BS81

W:WHITE  
B:BLACK

1:Au 1U\*  
6:Au 30U\*

1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
4	HOUSING	LCP	1	UL94V-0
3	UP SHELL	SPCC	1	PLATED NICKEL
2	DOWN SHELL	SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN

X.	X' ±2'	UNITS	mm
.X ±0.35	.X' ±2'	MAT'L	SEE NOTE
.XX ±0.3	.XX' ±1'	FINISH	SEE NOTE
.XXX ±0.25	.XXX'	Q'TY	SEE NOTE
.XXX ±0.15	.XXX'		

**东莞市腾兴电子有限公司**

TITLE: MINI USB 5P/M (超薄B型前五后四) (焊线式 四件套)

PART NO.: MUBM-05\*N-4BS81

DR: gan 2012/07/03

DWG NO.: AII-S81

CHKD: gan 2012/07/03

SCALE: 1:1

APPD:

REVISION: 1/1

REV. B

CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.