




**RoHS**  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

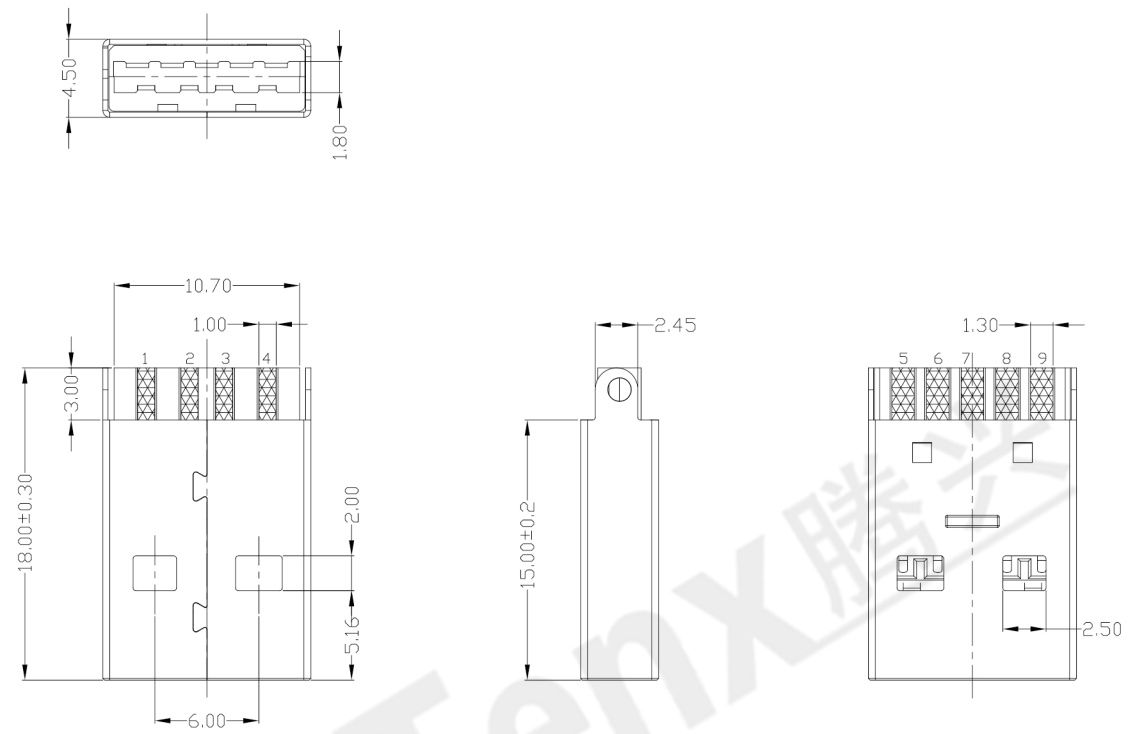

NOTES:  
 1.ELECTRICAL:  
 1) VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;  
 2) INSULATION RESISTANCE: 100MΩ MIN;  
 3) CONTACT RESISTANCE: 30mΩ MAX;  
 4) WITHSTANDING VOLTAGE: 100V AC;  
 5) OPERATING TEMPERATURE: -55°C TO +85°C.  
 2.Mechanical:  
 1) Mating Force: 35N MAX  
 2) Unmating Force: 10N MIN.  
 3. DIMENSIONS MARKED "▼"  
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
 USAM-09\*N-1BLSU32  
 1:Au 1U\*  
 5:Au 15U\*  
 6:Au 30U\*  
 W:WHITE  
 B:BLACK  
 BL:BLUE  
 1:PBT  
 2:PA6T  
 3:PA9T  
 4:LCP

Bill of materials:

4	HOUSING	PBT+30%GF	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS mm
3	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX*	SEE NOTE
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH SEE NOTE
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		

<b>东莞市腾兴电子有限公司</b>			
TITLE: USB AM 3.0 短体 手工焊线一体式		PART NO.: USAM-09XN-1BLSU32	
DR: Ricky 2019/2/19		DWG NO.: AII-SU32	
CHKD: Ricky 2019/2/19		SCALE: 1:1	SHEET: 1/1
APPD:		REV. B	CUSTOMER DRAWING

