

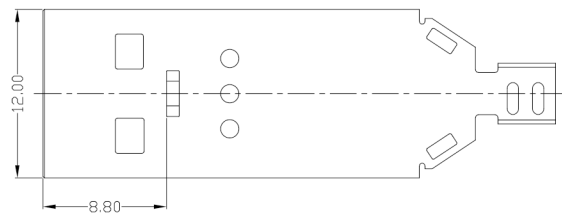


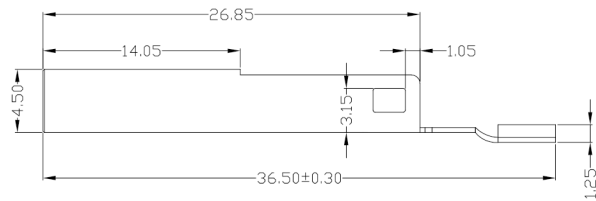


RoHS Compliant
2002/95/EC


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

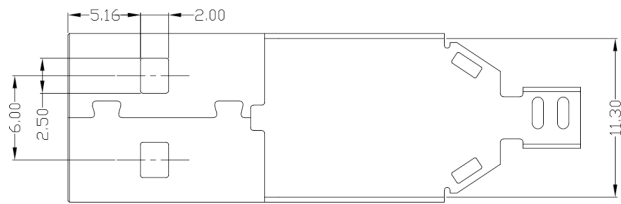



FRONT SHELL

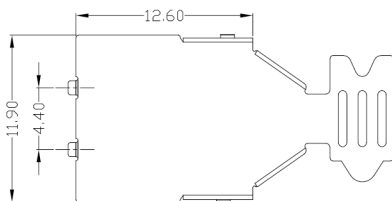

BACK SHELL

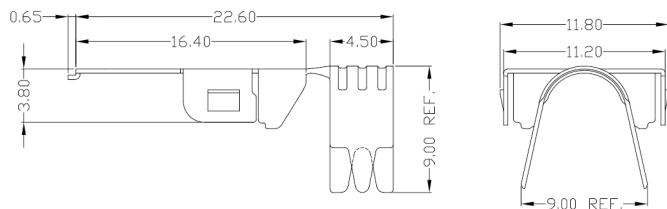

CONNECTOR

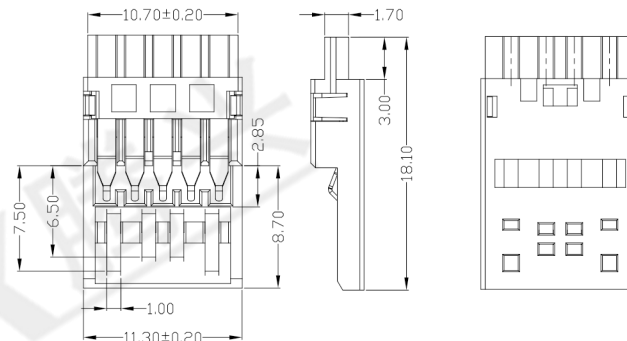

NOTES:

- ELECTRICAL:**
 - VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:**
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼"**
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USAM-09*N-1BLSU33
- 1: Au 1U*
 - 5: Au 15U*
 - 6: Au 30U*
 - W: WHITE
 - B: BLACK
 - BL: BLUE
 - 1: PBT
 - 2: PA6T
 - 3: PA9T
 - 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
4	HOUSING	PBT+30%GF	1	UL94V-0
3	SHELL	SPCC	2	PLATED NICKEL
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN

X	±0.35	X' ±2'	UNITS	mm
.X	±0.3	.X' ±1'	MAT'L	SEE NOTE
.XX	±0.25	.XX'	FINISH	SEE NOTE
.XXX	±0.15	.XXX'	Q'TY	SEE NOTE

东莞市腾兴电子有限公司

TITLE: USB AM 3.0 手工焊线
普通款三件套0D6.0

PART NO.: USAM-09XN-1BLSU33

DR: Ricky 2019/2/21

CHKD: Ricky 2019/2/21

APPD:

DWG NO.: AII-SU33

SCALE: 1:1

SHEET: 1/1

REV.:

CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

