




RoHS Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

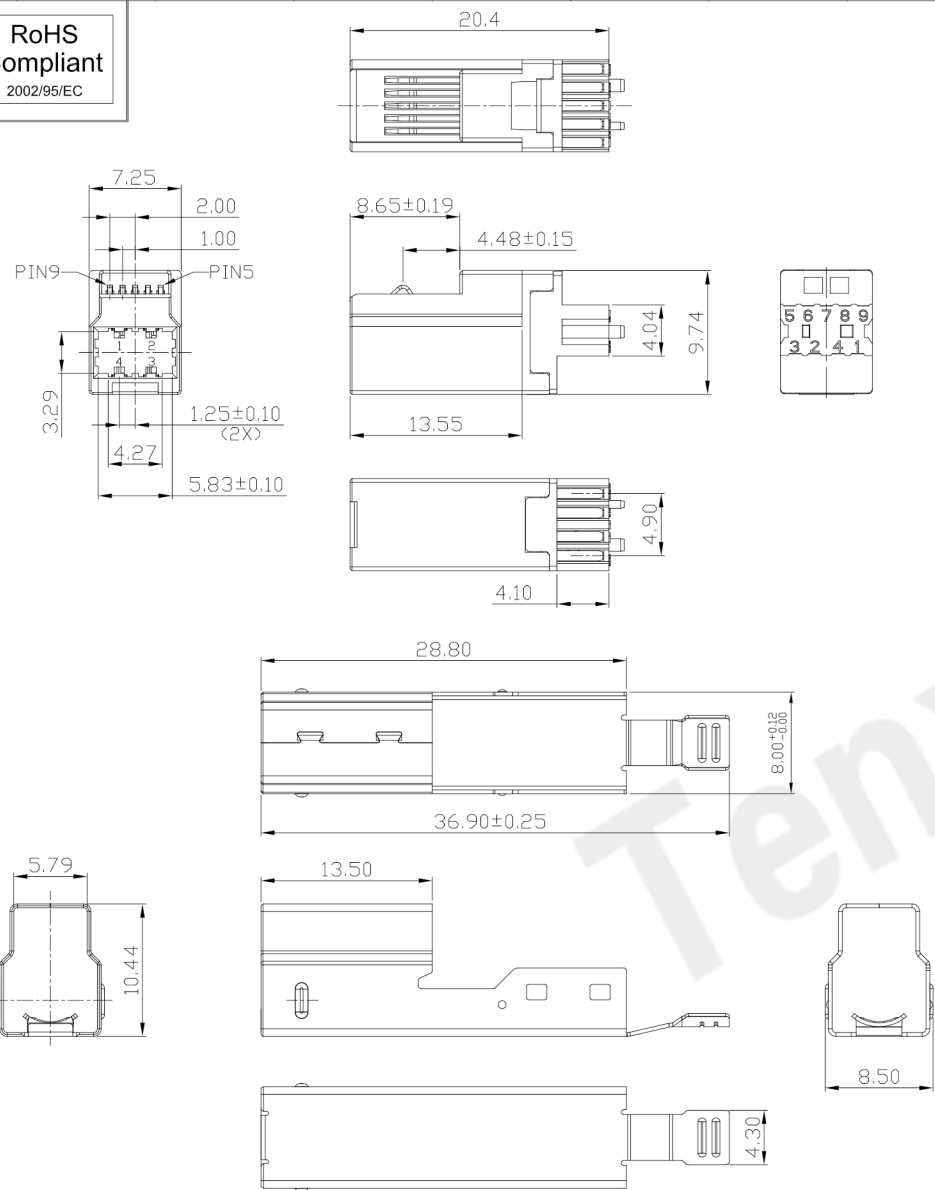

NOTES:

- ELECTRICAL:**
 - VOLTAGE CURRENT RATING: 1.8AMP (PIN1 AND PIN4 OF) 0.25AMP (ALL OTHERS), 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX.
FOR VBUS AND GND CONTACTS (PIN1, PIN4, PIN7); 50mΩ MAX. FOR ALL OTHER CONTACTS
 - WITHSTANDING VOLTAGE: 100V(RMS) AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:**
 - Mating Force: 35N MAX.
 - Unmating Force: 10N MIN.
8N Min After Durability.
- DIMENSIONS MARKED "▼"**
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USBM-09*N-1BLSU36

1: Au 1U"
5: Au 15U"
6: Au 30U"

1PBT
2PA6T
3PA9T
4LCP

W: WHITE
B: BLACK
BL: BLUE

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5				
4	HOUSING	PBT+30%GF	1	UL94V-0
3	SHELL	SPCC	2	PLATED NICKEL
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC

UNITS	mm	东莞市腾兴电子有限公司			
.X ±0.38	.X' ±3'	TITLE: USB 3.0 BM 手工焊线款三件套 OD=5.5 外壳带卡凸	PART NO.:		
.XX ±0.25	.X' ±3'		USBM-09XN-1BLSU36		
.XXX ±0.20	.XX' ±3'		DWG NO.:		
SEE NOTE	SEE NOTE	DR: Ricky 2019/08/26	AII-SU36		
SEE NOTE	SEE NOTE	CHKD: Ricky 2019/08/26	SCALE	SHEET	REV.
Q'TY	APPD:		1:1	1/1	B
					CUSTOMER DRAWING