



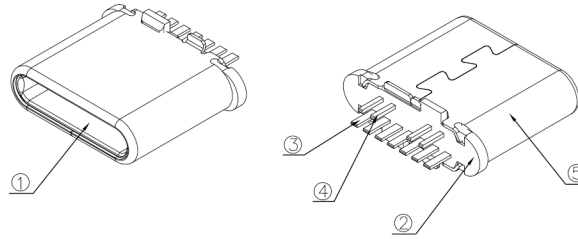

RoHS
Compliant
2002/95/EC




Halogen Free

REV	LTR	DESCRIPTION	DATE	REVISER	APPD


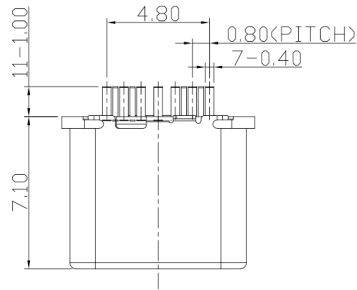


Pin Assignments And Mating Sequence:

Pin NO.	Signal Name	Mating Sequence
A1	GND	First
A4	V _{BUS}	First
A5	CC1	Second
A6	Dp1	Second
A7	Dn1	Second
A9	V _{BUS}	First
A12	GND	GND
Shell		GND

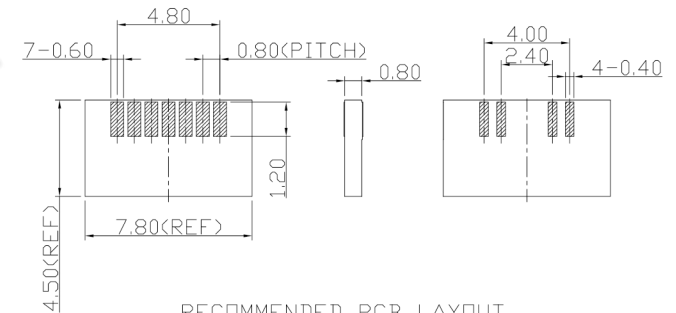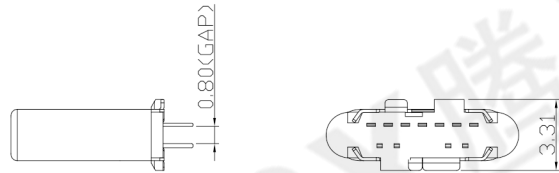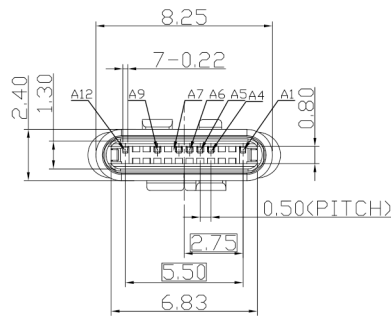

RECOMMENDED PCB LAYOUT



8PCS连料出货

备注: 此为连料出货, 除非客户另有要求为单PCS出货;

NOTES:

1.ELECTRICAL:


- 1)CURRENT RATING: 3AMP MAX;
- 2)INSULATION RESISTANCE: 100MΩ MIN 250V DC;
- 3)CONTACT RESISTANCE: INITIAL 40mΩ MAX; AFTER 50mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC MIN;
- 5)OPERATING TEMPERATURE:-40°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 5N~20N MAX.
- 2)Unmating Force: 8N~20N MIN.
- 3)Durability: 10,000 CYCLES.;

3.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5	SHELL	STAINLESS STEEL	1	PLATED NICKEL
4	LATCH	STAINLESS STEEL	1	PLATED NICKEL/TIN
3	TERMINAL	COPPER ALLOY	7	PLATED GOLD/TIN
2	INSULATOR	LCP+30%GF	1	UL94V-0
1	HOUSING	LCP+30%GF	1	UL94V-0

X.	X.±0.38	X.'±5'	UNITS	mm
.X	±0.30	±3'	MAT'L	SEE NOTE
.XX	±0.20	±1'	FINISH	SEE NOTE
.XXX	±0.10	±1'	Q'TY	SEE NOTE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC

东莞市腾兴电子有限公司

TITLE:	PART NO.:			
USB TYPE C PLUG 2.0 7PIN 夹板式	USCM-07XN-4WSJ40			
DR:	DWG NO.:			
Ricky 2018/1/26	AI1-SJ40			
CHKD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
Ricky 2018/1/26	1:1	1/1	B	