





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

可选性P.C.B LAYOUT

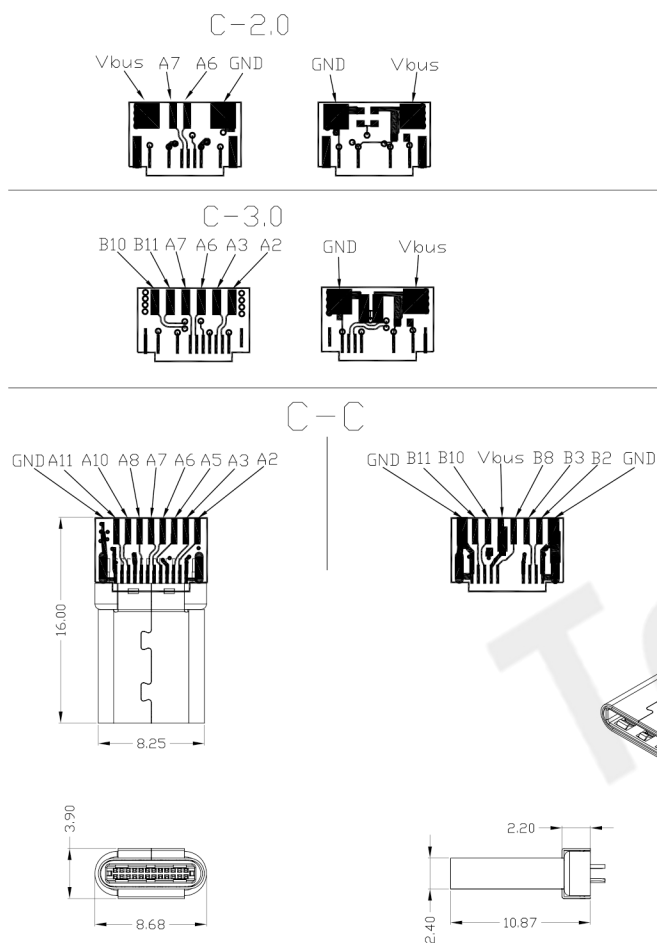

前端接口

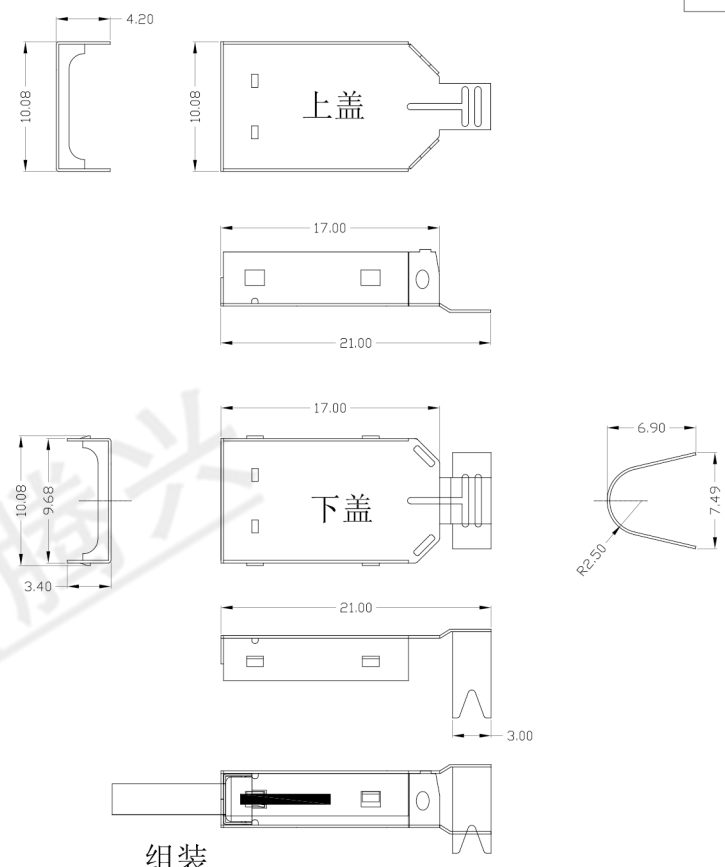

组装

- NOTES:
- ELECTRICAL:
 - CURRENT RATING: 0.5AMP;
 - INSULATION RESISTANCE: 100MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 250V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED '▼' TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USCM-24*N-4BS62-PC

- 1Au 1U'
- 2Au 3U'
- 5Au 15U'
- 6Au 30U'
- W/WHITE
- B/BLACK
- 1PBT
- 2PA6T
- 3PA9T
- 4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING			
6	COVER	SPCC	2	PLATED NICKEL	X. ±0.35	X.' ±2'	UNITS mm
5	SHRAPNEL	STAINLESS STEEL	2		.X ±0.3	.X' ±1'	MAT'L
4	HOOK	STAINLESS STEEL	1	PLATED TIN	.XX ±0.25	.XX'	SEE NOTE
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX ±0.15	.XXX'	FINISH
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD/TIN			SEE NOTE
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市腾兴电子有限公司

TITLE:	USB AM 3.1 Type-C 柳合式焊杯折弯	PART NO.:	USCM-24*N-4BS62-PC
DR:	gan 2015/5/12	DWG NO.:	AII-S62-PC
CHKD:	gan 2015/5/12	SCALE	1:1
APPD:		SHEET	1/1
		REV.	B
		CUSTOMER DRAWING	