

### SPECIFICATIONS

**MECHANICAL LIFE:** 40,000 make-and-break cycles.

**CONTACT RATING:** 0.4 VA max. @ 20 V AC or DC max.

**CONTACT RESISTANCE:** Below 100 mΩ typ. initial @ 2-4 V DC, 100 mA.

**INSULATION RESISTANCE:** 500 MΩ min.

**DIELECTRIC STRENGTH:** 500 Vrms min. @ sea level.

**OPERATING TEMPERATURE:** -30°C to 85°C

### MATERIALS

**HOUSING AND BASE:** Glass filled nylon 6/6 or 4/6, flame retardant, heat stabilized (UL94V-0)

**ACTUATOR:** Glass filled nylon 6/6, flame retardant, heat stabilized (UL94V-0), with standard internal o-ring seal.


**SWITCH SUPPORT:** Steel, with Sn plated.

**CONTACT / TERMINALS:** Gold plated Copper alloy.

IP 67  
ACCORDING TO  
EN 60529:1991+A1:2001  
IEC 60529:2001



## HOW TO ORDER

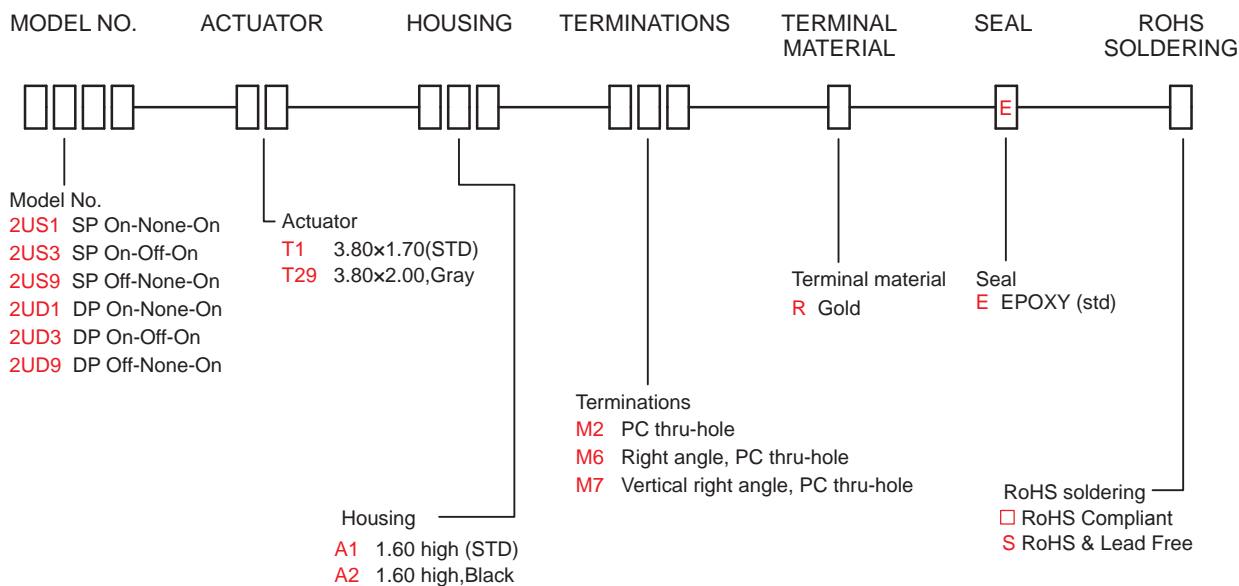

NOTE: T29A2 type only for 2US1/2US3/2UD1/2UD3 function

# 2U Series

Sealed Ultraminiature Toggle Switches


## SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC		
		POS.1	POS.2	POS.3	POS.1	POS.2	POS.3
SP	2US1	ON	NONE	ON	5-6	N/A	5-4
	2US3	ON	OFF	ON		OPEN	
	2US9	OFF	NONE	ON	OPEN	N/A	4-6
DP	2UD1	ON	NONE	ON	2-3,5-6	N/A	2-1,5-4
	2UD3	ON	OFF	ON		OPEN	
	2UD9	OFF	NONE	ON	OPEN	N/A	


MOM=MENTORY

## POLE OPTIONS

M2

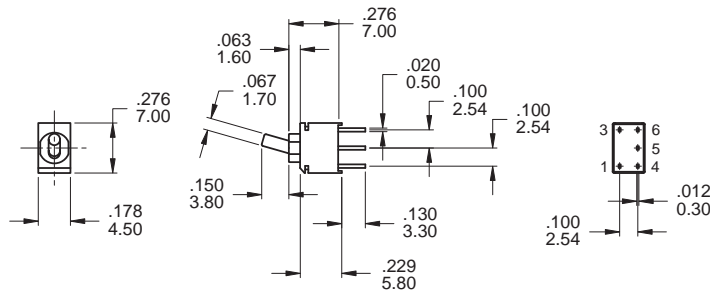


P.C. MOUNTING




SPDT

Part No. Shown : 2US1T1A1M2RE

M2

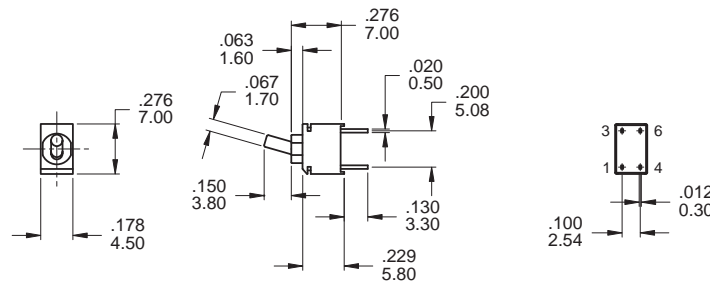


P.C. MOUNTING




SPDT

Part No. Shown : 2US9T1A1M2RE

M2

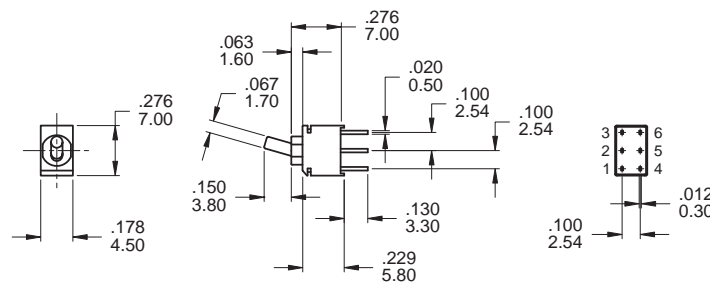

P.C. MOUNTING




DPDT


Part No. Shown : 2UD1T1A1M2RE

2U Toggle Switches

### M6

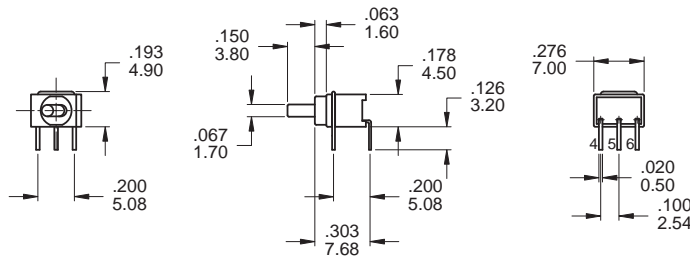


#### P.C. MOUNTING

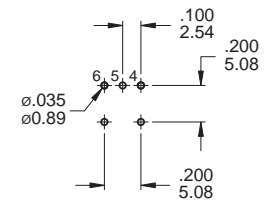


### SPDT

Part No. Shown : 2US1T1A1M6RE

### M6

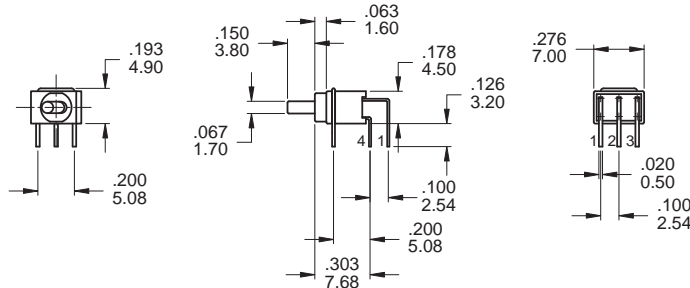



#### P.C. MOUNTING




### DPDT

Part No. Shown : 2UD1T1A1M6RE

### M7

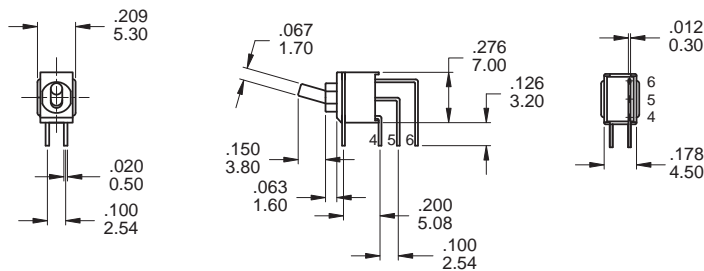



#### P.C. MOUNTING

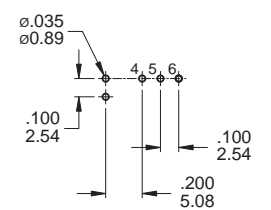


### SPDT

Part No. Shown : 2US1T1A1M7RE

### M7

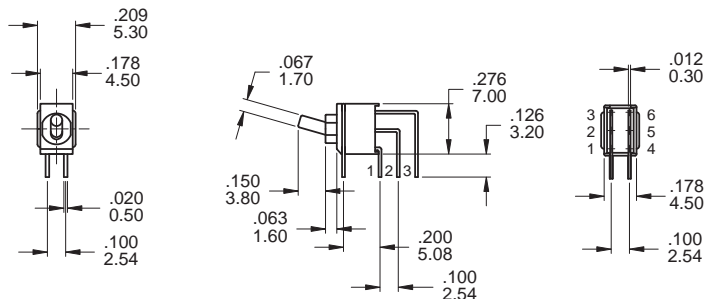

#### P.C. MOUNTING

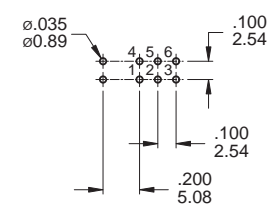

### DPDT

Part No. Shown : 2UD1T1A1M7RE



2U  
Toggle Switches

