



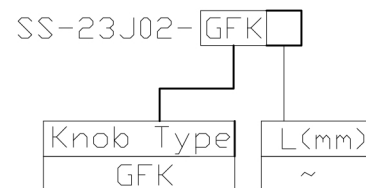
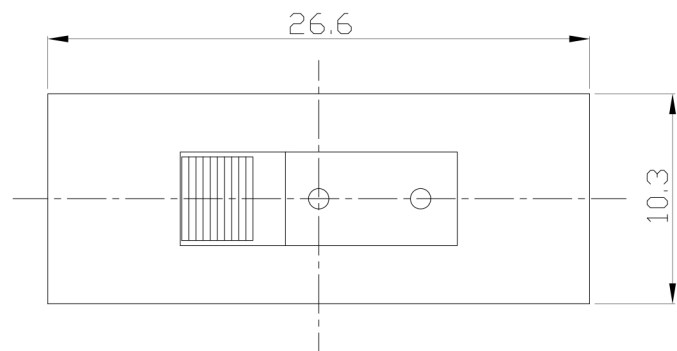


MODEL CODE

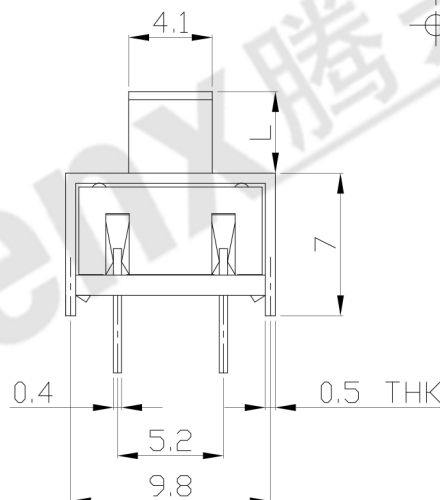

P.C.B LAYOUT
BOTTOM VIEW


CIRCUIT DIAGRAM

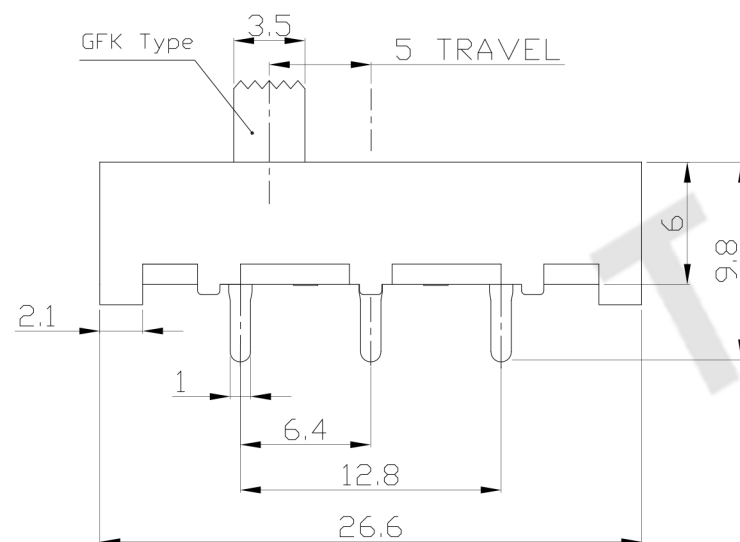

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	东莞市腾兴电子有限公司						
7	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L							
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE:	PART NO.:					
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			SLIDE SWITCH / VERTICAL	SS-23J02					
4	TERMINAL	BRASS STRIP	6	Ag PLATED		FINISH	DR:	Ricky 2016/02/18		DWG NO.:			
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	CHKD:	Ricky 2016/02/18		ADL-23J02			
2	FRAME	STEEL STRIP	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.	Q'TY							
1	KNOB	POM	1	BLACK									
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:			SCALE	SHEET	REV.	CUSTOMER DRAWING
1		2		3		4		5		6		7	