


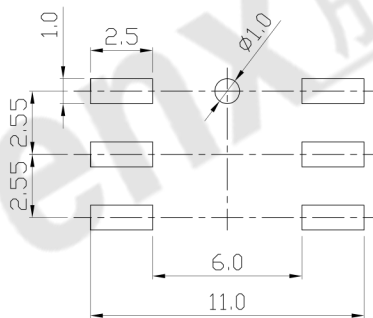



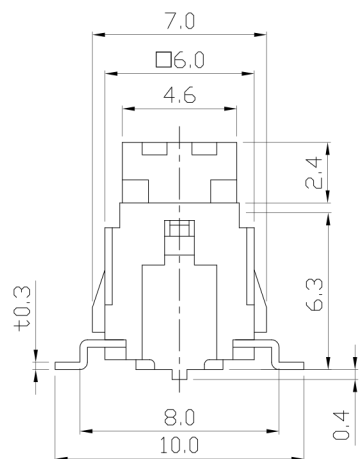

RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

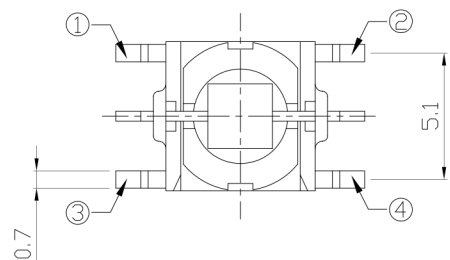

MODEL CODE

ATI-008-MW16-1MN**-BS
1 2 3 4 5 6 7 8 9

- 1. Series Number
- 2. Terminal Type: M=SMT
- 3. Stem Color: W=White B=Black
- 4. Operating Force: 16=160gf 25=250gf
- 5. Circuit
- 6. LED Type: M=SMT
- 7. LED Brightness: N=Normal S=Super Bright H=Super High Bright
- 8. LED Color: 01=Red 02=Yellow 03=Green 04=Blue 05=White 06=Pure Green 08=Amber 09=Blue Green 0A=Pink 0B=Purple
- 9. Packing Type: BS=Blister Packing TR=Tape Reel Packing

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC 12V 50mA	
CONTACT RESISTANCE	100mΩ MAX.	
TRAVEL	0.25±0.1mm	
OPERATING FORCE	160±50gf	250±50gf
OPERATING LIFE(cycles)	100,000	

8						
7						
6						
5	LED		1			
4	CONTACT	PBS C5210R-EH	1	Ag CLAD		
3	TERMINAL	BRASS STRIP	4	Ag PLATED		
2	CASE	NYLON+F.G	1	BLACK		
1	KNOB	NYLON+F.G	1	NATURAL/BLACK		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATIVE INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATIVE INC.

UNITS	mm	东莞市腾兴电子有限公司				
MAT'L	SEE NOTE					
FINISH	SEE NOTE	TITLE:	PART NO.:			
Q'TY	APPD:	ILLUMINATED TACT SWITCH	ATI-008-M			
		DR: Ricky 2016/10/07	DWG NO.:			
		CHKD: Ricky 2016/10/07	AZJ-008-M			
			SCALE	SHEET	REV.	CUSTOMER DRAWING
			4:1	1/1	A	