Pb Process Capable

RoHS Compliant 2002/95/EC

| REV. | ECN. NO. | APPD. |
|---|---|---|
| | | |
| | | |
| | | |

## DIMENSIONS

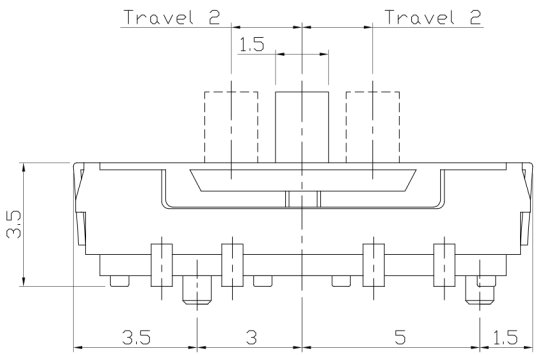


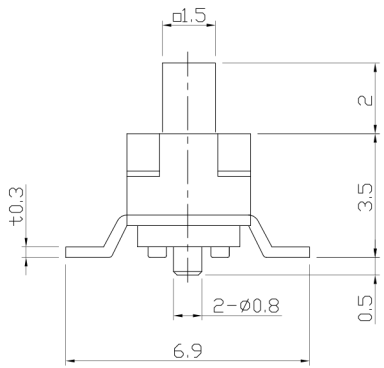


## CIRCUIT DIAGRAM




## PRODUCT IMAGE



## MODEL CODE

AS-2336S□-B

| L | (mm) |
|---|---|
| - | 2.0 |

| Knob Color | |
|---|---|
| B | Black |
| W | White |

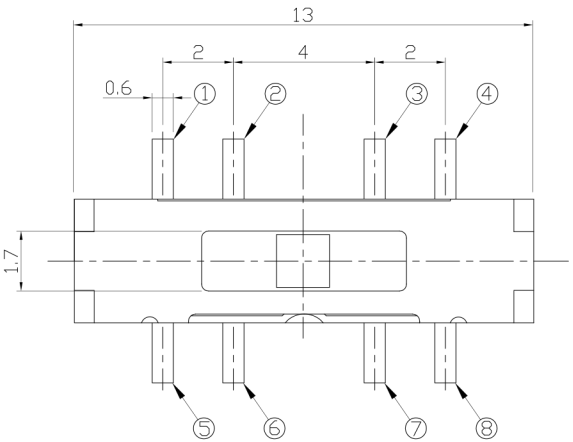


## P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

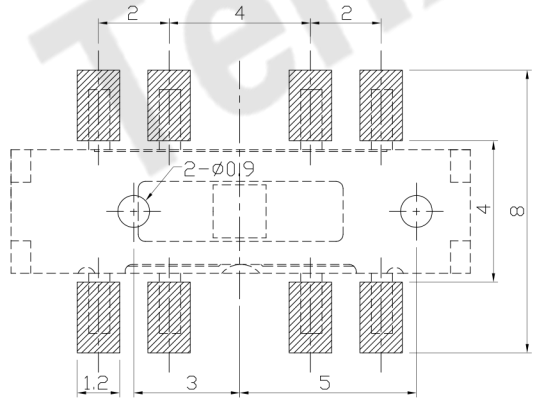


## ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | |
|---|---|
| Rating | DC 6V 0.3A |
| Circuit | 2C-3P |
| Contact Resistance | 70mΩ Max. |
| Travel | 2.0 ± 0.3mm |
| Operating Force | 250±100gf |
| Operating Life(cycles) | 10,000 |

Tenx 腾兴

| .X ±0.2 | X. ±2° |
|---|---|
| | |
| | |
| | |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

东莞市腾兴电子有限公司

TITLE: MINI SLIDE SWITCH

PART NO.: AS-2336S SERIES

DR: Ricky 2014/04/03

DWG NO.: ASI-2336S

CHKD: Ricky 2014/04/03

APPD:

| SCALE | SHEET | REV. | |
|---|---|---|---|
| 1:1 | 1/1 | A | CUSTOMER DRAWING |