

RoHS
COMPLIANT

◆ SPECIFICATIONS

- Current rating: 2.5A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.



Material:

Insulator: PA6T UL 94V-0(2-10P)
LCP UL 94V-0(11-15P)




Contact: Brass

Plating: Tin plated over Nickel

Suitable: KR1500 series Housing

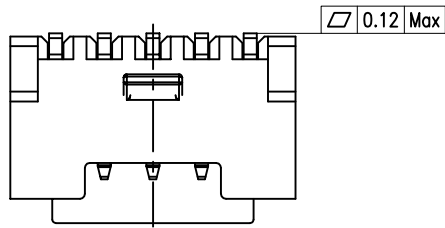


3D View



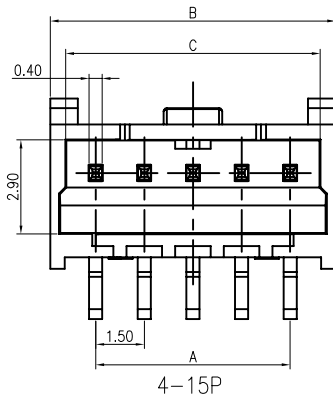


C1500VS1**09M0102RA
02: 2P
16: 16P
09: PA6T本色
13: LCP本色
M01: 雾锡
G01: 漂金
R: 卷装
P: 袋装

Dimensions			
Pin	A	B	C
2P	1.50	4.30	3.35
3P	3.00	5.80	4.85
4P	4.50	7.30	6.35
5P	6.00	8.80	7.85
6P	7.50	10.30	9.35
7P	9.00	11.80	10.85
8P	10.50	13.30	12.35
9P	12.00	14.80	13.85
10P	13.50	16.30	15.35
11P	15.00	17.80	16.85
12P	16.50	19.30	18.35
13P	18.00	20.80	19.85
14P	19.50	22.30	21.35
15P	21.00	23.80	22.85



WITH CAP VIEW

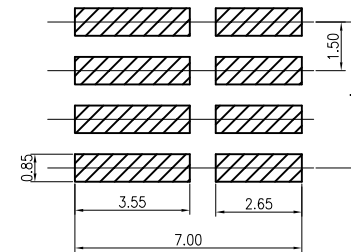

P.C.Board Layout

MARK	REVISION DESCRIPTION	SIGNATURE	DATE
A4	增加2-3P视图	Arvin	2021.02.23
A3	更改料号及图框格式	Ru yi	2020.3.10
A2	11-15P变更材质	Arvin	2019.03.13

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
MX1.5带扣 SMT 180°
Wafer

DRAWN: ru yi 2020.03.10

CHECKED:

APPROVED:

UNIT: mm SCALE: N/A

SHEET: 1/1

PROJECTION

东莞市腾兴电子有限公司

PART NO.: C1500VS1****M01**RA

REV.: A4 DRAWING NO.: 1500WS02-A-S

1

2

3

4

5

6

7

8

9