
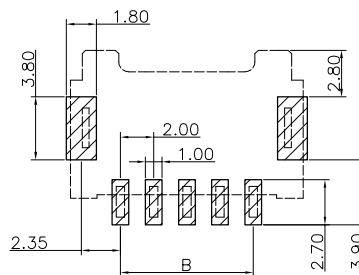



RoHS  
COMPLIANT







Recommended P.C.B. Layout  
Total tolerance: ±0.05mm

- ◆ SPECIFICATIONS
- Current rating: 3A (AWG #22) AC, DC
  - Voltage rating: 250V AC, DC
  - Temperature range: -40°C ~ +105°C
  - Insulation resistance: 1000MΩ Min.
  - Withstanding voltage: 800V AC/ minute.
  - Contact resistance: 20mΩ Max.


Material:  
Insulator: Nylon 9T UL 94V-0  
Pin: Brass  
Plating: Tin plated over Nickel  
Suitable: KR2014 series Housing

PART NO: C2014RS1\*\*11M0101RA



02: 2P  
16: 16P  
11: PA9T本色  
M01: 雾锡




SECTION:A-A

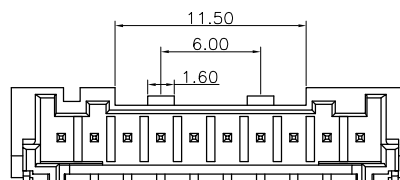


10-15P两个卡扣 视图



2P 视图



3P 视图



4P 视图

15P	34.00	28.00	30.50	23.00	13.60
14P	32.00	26.00	28.50	21.00	13.60
13P	30.00	24.00	26.50	19.00	13.60
12P	28.00	22.00	24.50	17.00	13.60
11P	26.00	20.00	22.50	15.00	13.60
10P	24.00	18.00	20.50	13.00	13.60
9P	22.00	16.00	18.50	11.00	7.00
8P	20.00	14.00	16.50	9.00	7.00
7P	18.00	12.00	14.50	7.00	7.00
6P	16.00	10.00	12.50	5.00	7.00
5P	14.00	8.00	10.50	5.00	7.00
4P	12.00	6.00	8.50	5.00	—
3P	10.00	4.00	6.50	1.00	—
2P	8.00	2.00	4.50	—	—
PIN数	A	B	C	D	E

F					TOLERANCE	TITLE:	DRAWN: ru yi 2020.03.10	东莞市腾兴电子有限公司		
		更改料号及图框格式	Ru yi	2020.3.10	X. X ±0.30	PA2.0 SMT 90° WF	CHECKED:			
		新发行	Ru yi	2017.7.29	X. XX ±0.25		APPROVED:	PART NO.: C2014RS1**11M0101*A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X. XXX ±0.10	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV.: A2

1 2 3 4 5 6 7 8 9