Pb Process Capable

RoHS Compliant 2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS





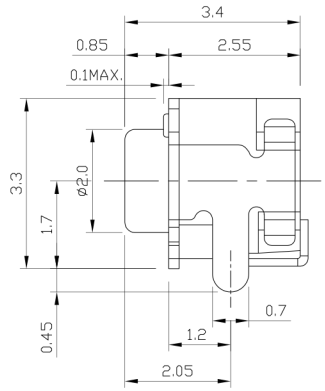



CIRCUIT DIAGRAM

P.C.B MOUNTING PATTERN DIMENSION

(ALL TOLERANCE:±0.05)



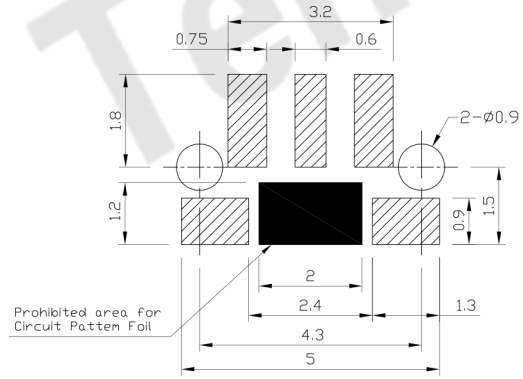

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 20mA
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	0.2±0.08mm
OPERATING FORCE	160±30gf
OPERATING LIFE(cycles)	100,000

Tenx 腾兴

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				
6				
5				
4				
3				
2				
1				

.X ±0.05	X. ±1°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS: mm

MAT'L: SEE NOTE

FINISH: SEE NOTE

Q'TY

东莞市腾兴电子有限公司

TITLE: TACT SWITCH

PART NO.: AT-1191 SERIES

DR: Ricky 2015/05/11

DWG NO.: AKS-1191

CHKD: Ricky 2015/05/11

APPD:

SCALE	SHEET	REV.	
1:1	1/1	A	CUSTOMER DRAWING