






**RoHS Compliant**  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS

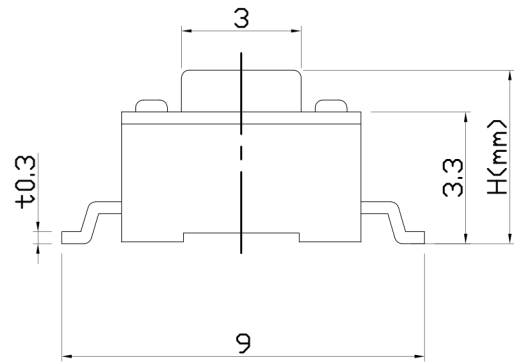

### CIRCUIT DIAGRAM



### PRODUCT IMAGE





### MODEL CODE

AT-1101NS-

	H	9
-	4.3	
A	5.0	

### P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

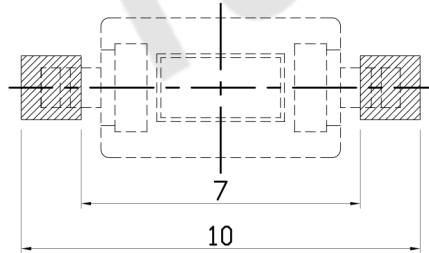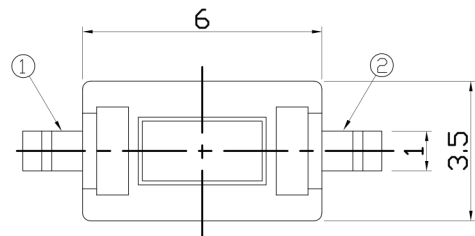

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.25 ± 0.1mm		
Operating Force	160,180±30gf	250±50gf	520±100gf
Operating Life(cycles)	50,000	30,000	10,000

.X ±0.2	X. ±2'	UNITS mm
		MAT'L
		SEE NOTE
		FINISH
		SEE NOTE
		Q'TY
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.</small>		

**东莞市腾兴电子有限公司**

TITLE: TACT SWITCH		PART NO.: AT-1101NS SERIES	
DR: Ricky 2014/03/25		DWG NO.: ASI-1101NS	
CHKD: Ricky 2014/03/25		SCALE	SHEET
APPD:		1:1	1/1
REV.	CUSTOMER DRAWING		A