Pb Process Capable

RoHS Compliant 2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

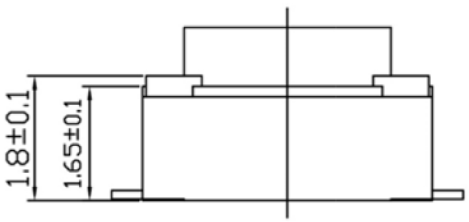

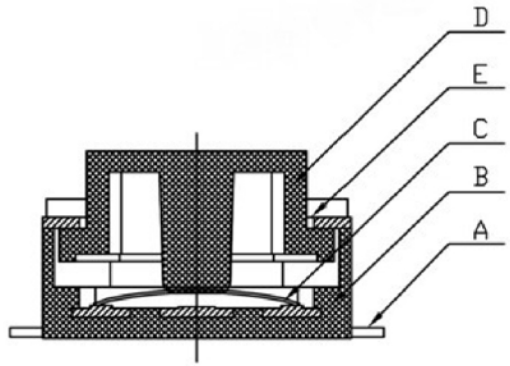

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

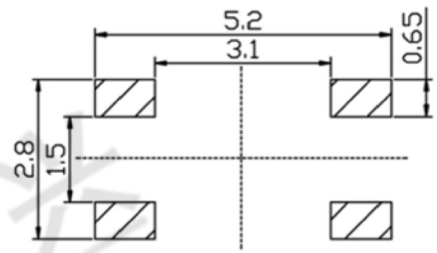

CIRCUIT DIAGRAM



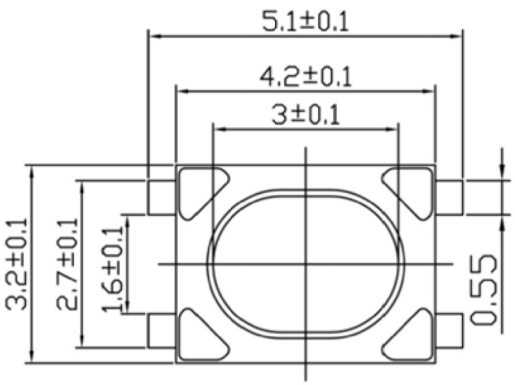



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.15 ± 0.1mm		
Operating Force	160±50gf	250±50gf	400±50gf
Operating Life(cycles)	50,000		

Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING
E	COVER	STAINLESS STEEL T=0.15mm	1	WASHING
D	KNOB	LCP	1	WHITE
C	CONTACT	STAINLESS STEEL	2	AG PLATED
B	CASE	LCP	1	WHITE
A	TERMINAL	PHOSPHOR BRONZE T=0.12mm	1	NI/AG PLATED

.X ±0.3 | X. ±2°

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市腾兴电子有限公司

TITLE: TACT SWITCH

PART NO.: AT-1182F SERIES

DR: Ricky 2018/06/11

DWG NO.: AKS-1182F

CHKD: Ricky 2018/06/11

APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	A	

Tenx 腾兴