

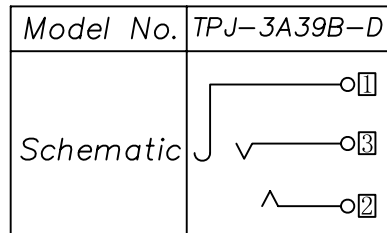


P. C. B Layout
(Copper-sided view)

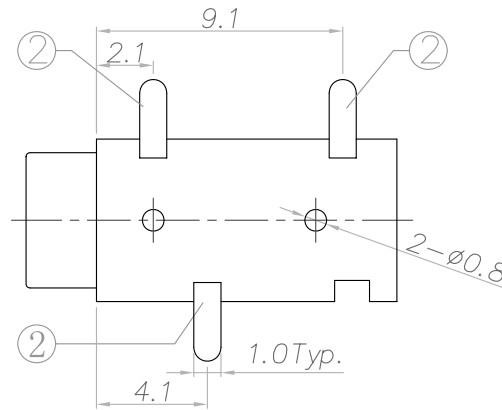

□ : TERMINAL NO.

- Ordering information:
 TPJ-3A39B-□ □ □ □ □ □ □
 (1) (2) (3) (4) (5) (6) (7)
- (1):Series No
 (2):Schematic option: D
 (3):Material of housing:
 9T=PA9T
 (4):Housing color:
 0A=Black 1_=Brown 2_=Red
 3_=Orange 4_=Yellow 5_=Green
 6_=Blue 7_=Purple 8_=Gray
 9_=White
 (5):Terminal plating
 S:Silver (Ag)
 (6):Special option:
 00:No special option
 (7):Packing mode:
 1.Reel packing

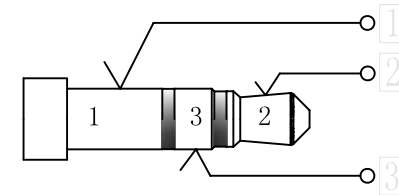

- SPECIFICATION**
- Rating : DC 30V 0.5A;
 - Contact resistance: ≤30mΩ;
 - Insulation resistance: ≥100MΩ (DC250V);
 - Withstand voltage: 500VAC ;
 - Insertion and extraction force: 3-25N;
 - life test: 5,000 cycles.

②	Earth spring	1&2&3	3	Phosphor bronze	TPJ-3A39B-01 (JA-1K0082)	Ag-Plating
①	Housing		1	PA9T UL94 V-0	TPJ-3A39B-SI (ST-1K0046)	
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING	

TENGXING ELECTRONICS CO.,LTD

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.03 ANGULAR: ±3°		SIGNATURES		DATE	TITLE
REVISIONS		APPV'D	CHK'D	DATE	NO.
A		Rex	Alex	2009.03.16	TPJ-3A39B
		SCALE			
		5/1			

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED
1			
2			
3			