


□ : TERMINAL NO.

Ordering information:
 TPJ-3A39F-D 66 0A □ □ □ 4
 (1) (2) (3) (4) (5) (6) (7)

- (1) :Series NO
- (2) :Schematic option: D
- (3) :Material of housing:66=PA66
- (4) :Housing color:0A=Black
- (5) :Terminal plating: S=Silver(Ag);
- (6) :Special option:
 00:No bulge; 0T:Have bulge.

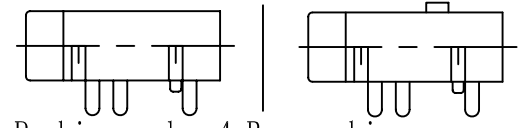

(7) :Packing mode: 4:Bag packing

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: ≤30mΩ;
3. Insulation resistance: ≥100MΩ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-25N;
6. life test: 5,000 cycles;
7. Sing" ▲s importance dimention.

NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING
③	Bushing	1	Brass	TPJ-3A39F-88(ZT-916)	Nickel plating
②	Earthing spring	1 1 2 3	Phosphor bronze t=0.25	TPJ-3A390-01(JA-0082)	Silver plating
①	Housing	1	PA66	TPJ-3A39F-S1(ST-922)	

TENGXING ELECTRONICS CO.,LTD

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR:±0.30 ANGULAR: ±3°	SIGNATURES		DATE	TITLE
	DRAWN	Amy	2008.03.22	EARPHONE JACK
	CHK'D	Alex	2008.03.22	NO.
REVISIONS	SCALE	APPV'D	Rex	2008.03.22
A	5/1	TPJ-3A39F		

△			
△			
△			
△			
△			
△			
SYM	DISCIPTION	DATE	APPROVED
1			
2			
3			