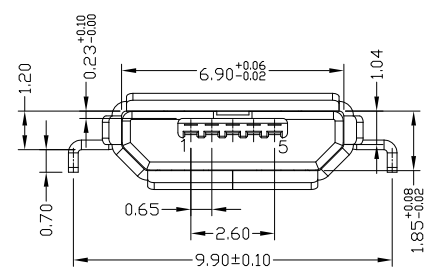
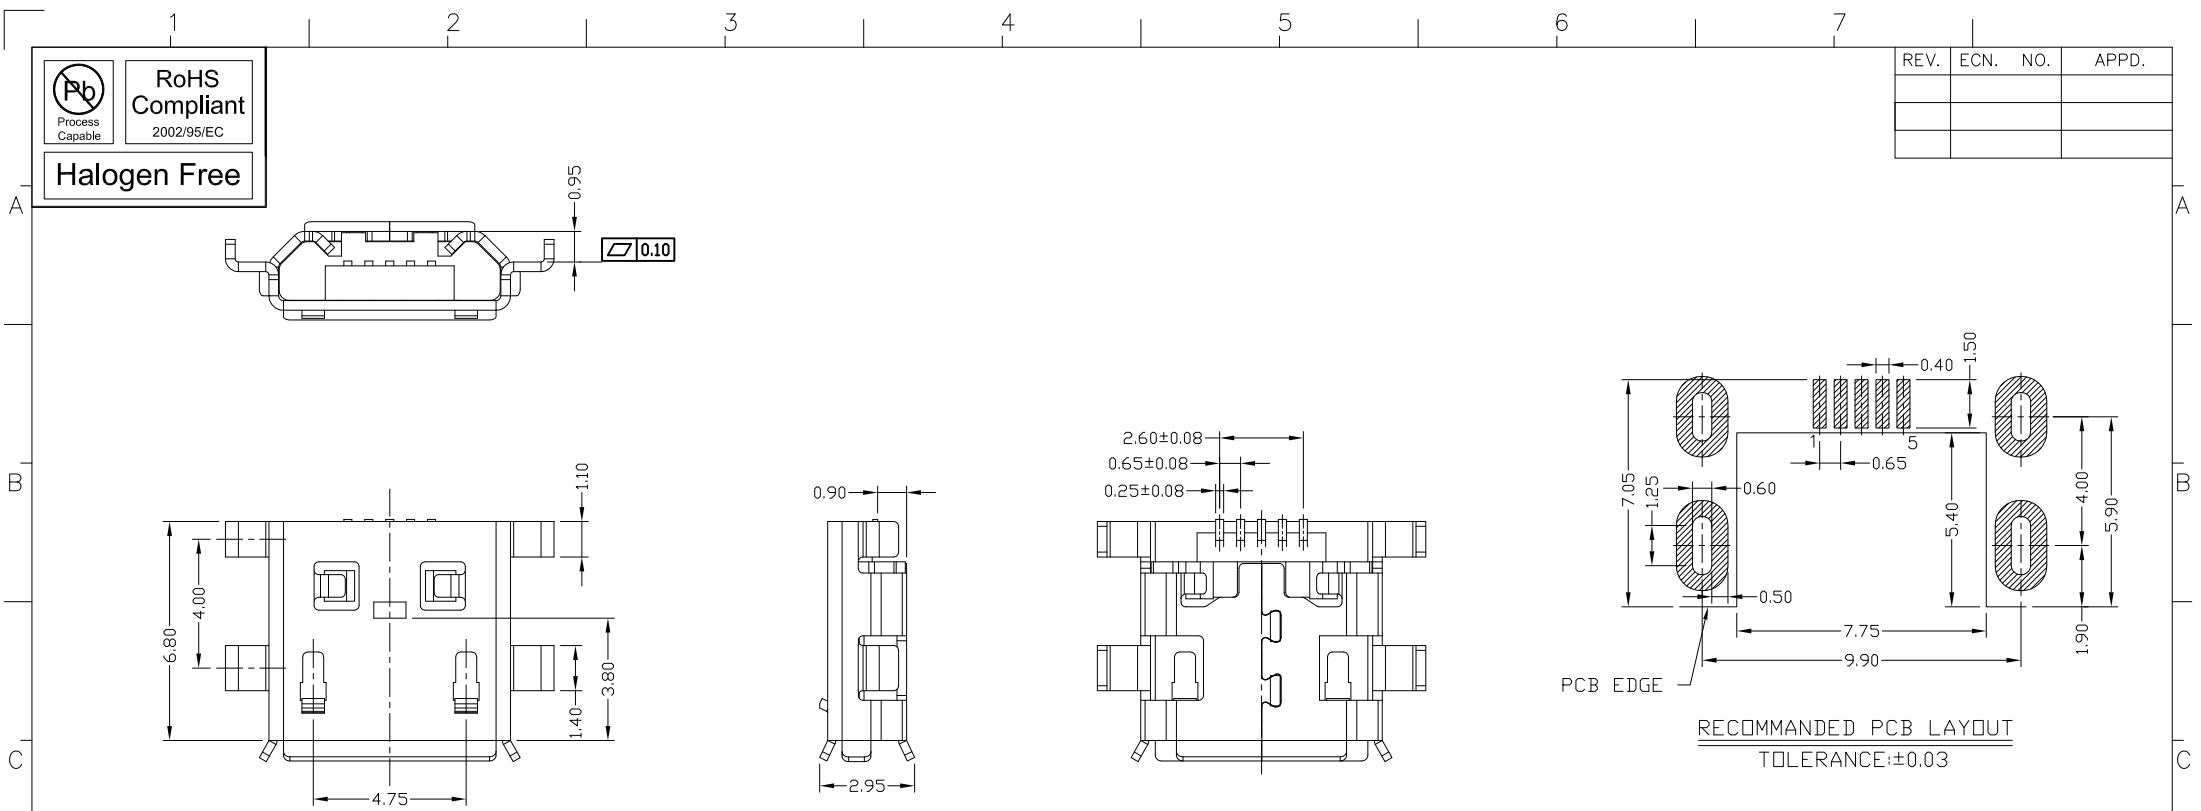

RoHS Compliant
 2002/95/EC
Halogen Free

REV.	ECN. NO.	APPD.



NOTES:
 1.ELECTRICAL:
 1)VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 2)INSULATION RESISTANCE: 100MΩ MIN;
 3)CONTACT RESISTANCE: 30mΩ MAX;
 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 5)OPERATING TEMPERATURE: -30°C TO +80°C.
 2.Mechanical:
 1)Mating Force: 35N MAX
 2)Unmating Force: 10N MIN.
 3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
MUYF-05*T-4BHUA576
 1:Au 1U"
 6:Au 30U"
 T:TIN
 N:NICKEL
 W:WHITE
 B:BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市腾兴电子有限公司								
3	SHELL	COPPER ALLOY	1	PLATED TIN	X. ±0.35	X.' ±2'	MAT'L	TITLE: MICRO USB B TYPE F 5P SMT沉板0.9 长6.8有导位 DR: <i>Ricky</i> 2018/5/4 CHKD: <i>Ricky</i> 2018/5/4 APPD:		PART NO.: MUYF-05*T-4BHUA576 DWG NO.: AII-HUA576		SCALE	SHEET	REV.	CUSTOMER DRAWING
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X' ±1'	SEE NOTE								
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'	SEE NOTE								
					.XXX ±0.15	.XXX'	Q'TY	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDDTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDDTECH INC		5:1	1/1	A			