

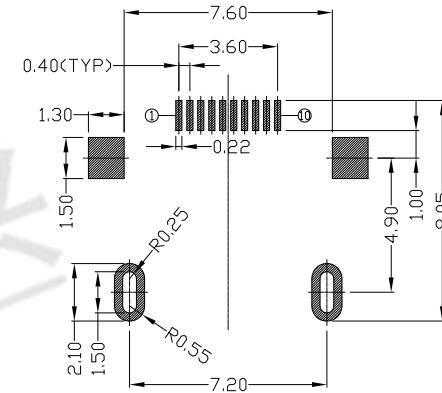

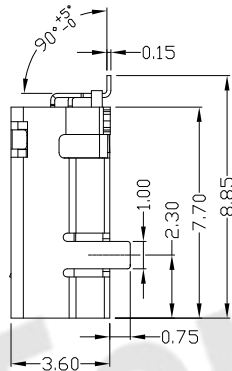
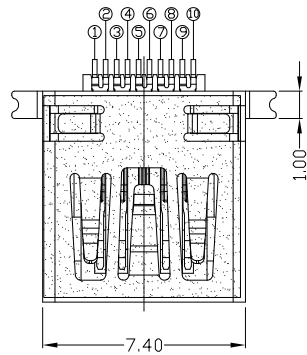





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

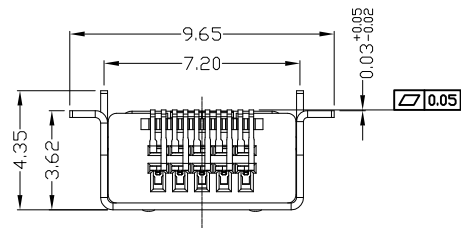

RECOMMENDED PCB LAYOUT



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,100V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUNF-101T-4BVS19-M
 1:Au 1U"
 6:Au 30U"
 W:WHITE
 B:BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'
2	SHELL	STAINLESS STEEL	1	PLATED TIN	.X ±0.3	.X' ±1'
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	.XX ±0.25	.XX'
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'

UNITS		mm		东莞市腾兴电子有限公司			
MAT'L		SEE NOTE					
FINISH		SEE NOTE		TITLE: MINI USB 10PIN PHILIPS 母座AB TYPE 无柱(短体)		PART NO.: MUNF-101T-4BVS19-M	
Q'TY		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		DR: gan 2014/09/25		DWG NO.: AII-VS19-M	
				CHKD: gan 2014/09/25		SCALE SHEET REV. CUSTOMER DRAWING	
				APPD:		1:1 1/1 B	