










RoHS
Compliant
2002/95/EC

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----|-------------|------|---------|------|
| | | | | | |

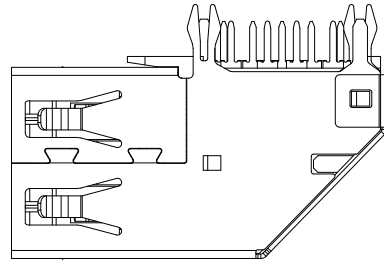

| PIN NUMBER | SIGNAL NAME |
|------------|-------------|
| 1 | VBUS |
| 2 | D- |
| 3 | D+ |
| 4 | GND |
| 5 | SSRX- |
| 6 | SSRX+ |
| 7 | GND |
| 8 | SSTX- |
| 9 | SSRT+ |
| Shell | Shield |

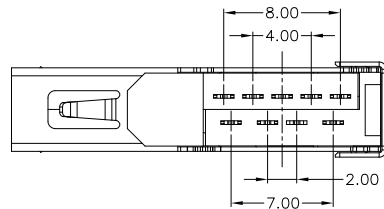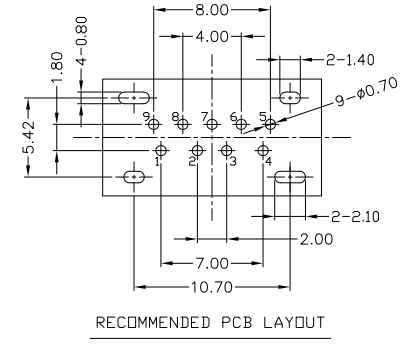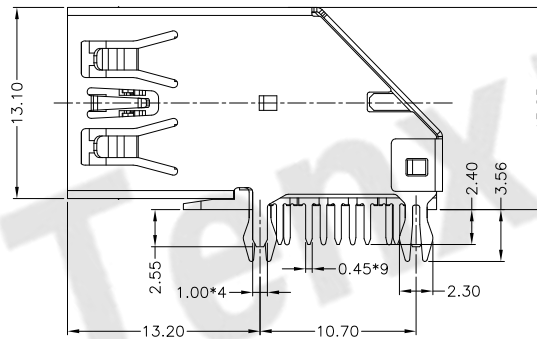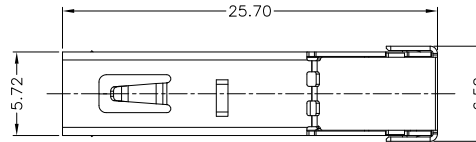

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.8AMP, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-09*N-4BLCC14

1:Au 1U"
5:Au 15U"
6:Au 30U"

W:WHITE
B:BLACK
BL:BLUE

1:PB
2:PA6T
3:PA9T
4:LCP

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING | X. | X.' ±2' | UNITS | mm |
|----|-----------|-----------------|-----|-----------------|------------|---------|----------|----|
| 4 | SHELL | STAINLESS STEEL | 1 | PLATED NICKEL | X. ±0.35 | X.' ±2' | UNITS | mm |
| 3 | HOUSING | LCP/PBT+30%GF | 1 | UL94V-0 | .X ±0.3 | .X' ±1' | MAT'L | |
| 2 | TERMINAL2 | COPPER ALLOY | 4 | PLATED GOLD/TIN | .XX ±0.25 | .XX' | SEE NOTE | |
| 1 | TERMINAL1 | COPPER ALLOY | 5 | PLATED GOLD/TIN | .XXX ±0.15 | .XXX' | SEE NOTE | |
| | | | | | | | FINISH | |
| | | | | | | | Q'TY | |
| | | | | | | | | |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC

东莞市腾兴电子有限公司

TITLE: USB 3.0 AF 90度 侧插式 外壳无卷边
小鱼叉脚 成品图

PART NO.: USAF-09*N-4BLCC14

DR: gan 2017/1/14

DWG NO.: AII-CC14

CHKD: gan 2017/1/14

APPD:

SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING