

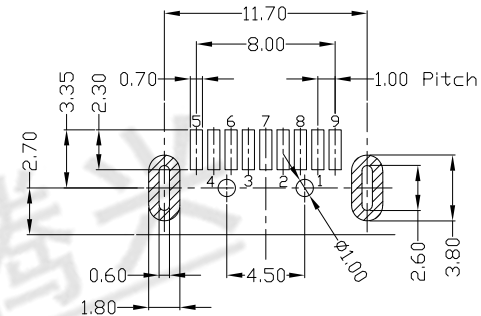
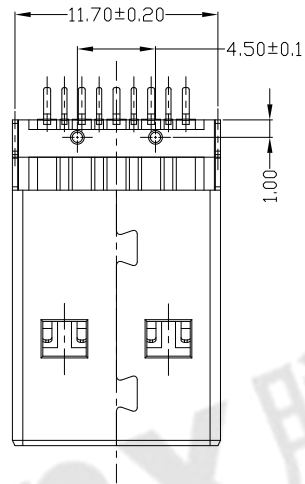



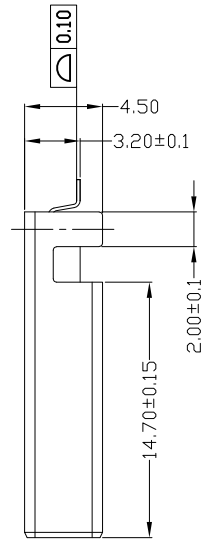


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

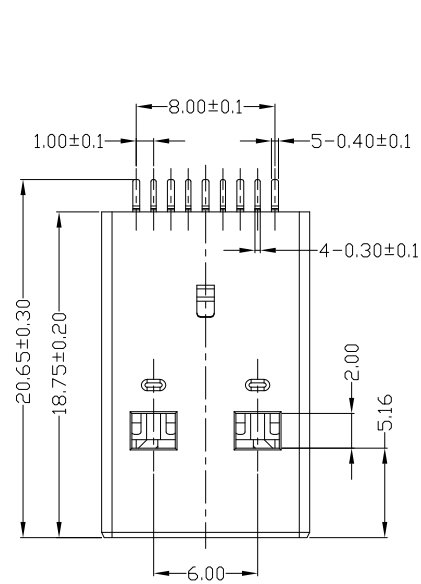

RECOMMENDED P.C.B LAYOUT

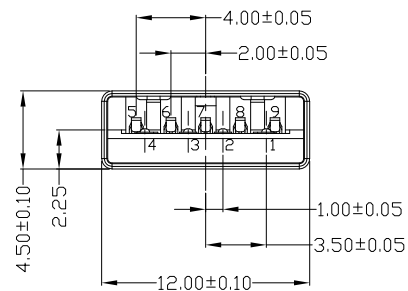

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAM-09*N-4BLVU37

- 1:AU 1U*
- 5:AU 15U*
- 6:AU 30U*
- V:WHITE
- B:BLACK
- BL:BLUE
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市腾兴电子有限公司							
3	HOUSING	LCP+30%GF	1	PLATED NICKEL	X. ±0.35	X.' ±2'	SEE NOTE	TITLE: USB AM 3.0 L=18.7MM 沉板3.2MM 有柱(外壳脚长4.50MM)锡脚1.9		PART NO.: USAM-09XN-4BLVU37				
2	SHELL	SPCC	1	UL94V-0	.X ±0.3	.X' ±1'								
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XX ±0.25	.XX'						DR: Ricky 2019/2/18	DWG NO.: AII-VU37	
					.XXX ±0.15	.XXX'						CHKD: Ricky 2019/2/18		
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC		Q'TY	APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING		
									1:1	1/1	B			