

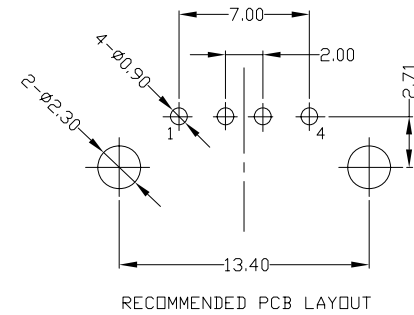
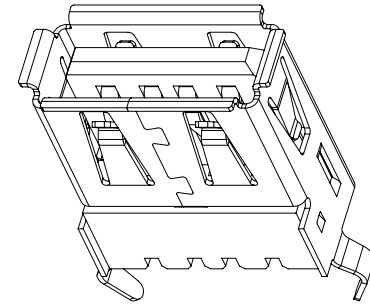
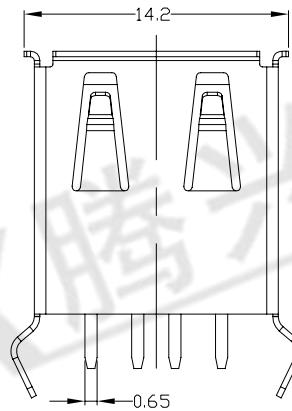
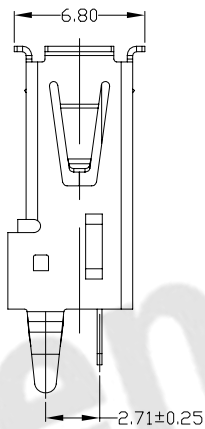



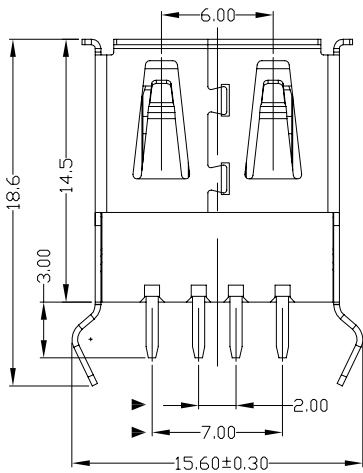

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*P63

W: WHITE
B: BLACK
1: Au 1U*
6: Au 30U*
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

4	COVER	PBT	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS mm	东莞市腾兴电子有限公司							
3	HOUSING	PBT	1	UL94V-0	.X ±0.3	.X.* ±1*	MAT'L								
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE	TITLE:	USB AF 180° DIP 14.5mm 弯脚		PART NO.: USAF-04*N-1*P63				
							FINISH	DR:	gan 2012/6/29		DWG NO.: AII-P63				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	CHKD:	gan 2012/6/29		SCALE		SHEET	REV.	CUSTOMER DRAWING
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	APPD:			1:1	1/1	B		
1		2		3		4		5		6		7			