


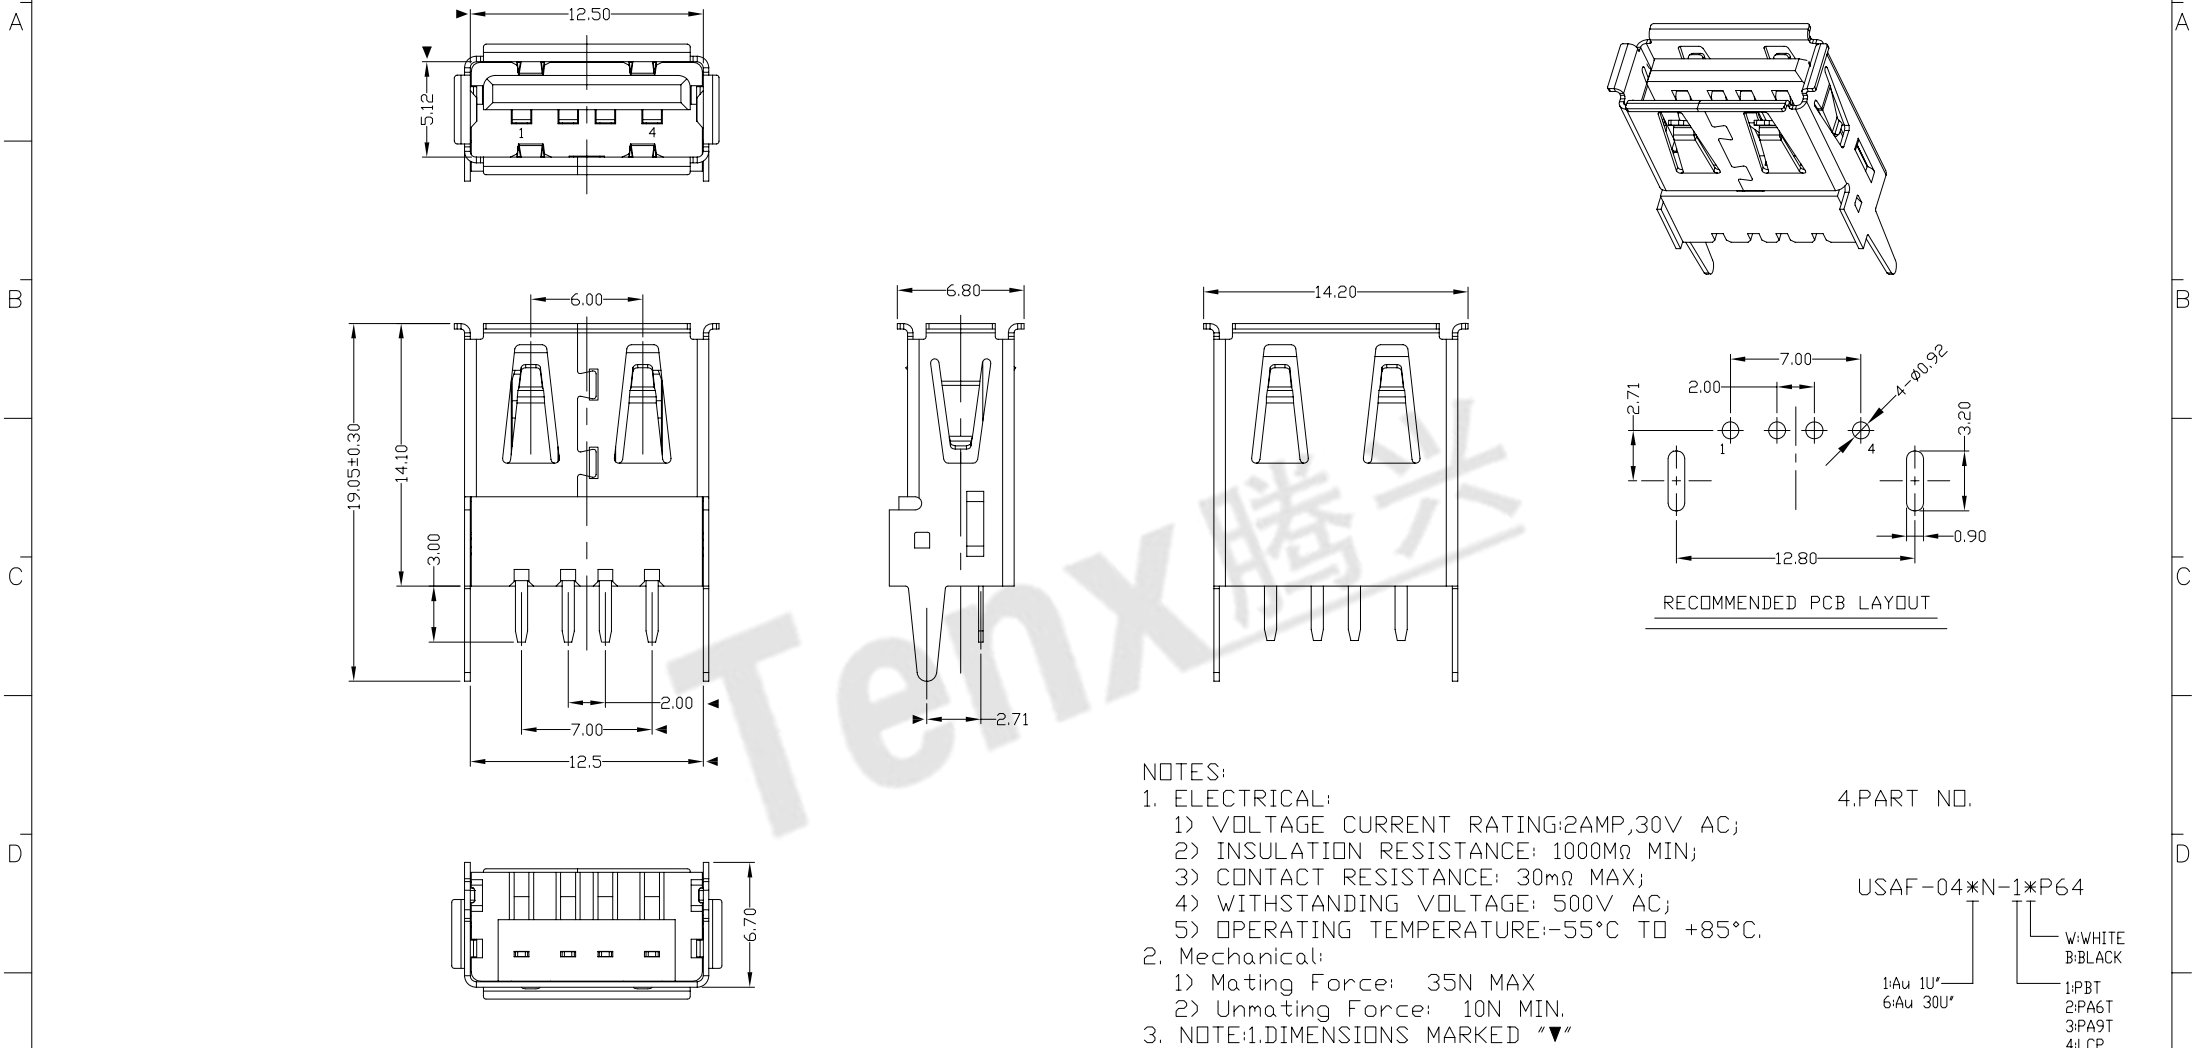

NOTES:

- 1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
- 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
- 3. NOTE:1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.
- 4.PART NO.

USAF-04*N-1*P64

W:WHITE
B:BLACK

1:1PBT
2:PA6T
3:PA9T
4:LCP

1:1Au 1U"
6:1Au 30U"

Bill of materials:

4	COVER	PBT	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS	mm	东莞市腾兴电子有限公司						
3	HOUSING	PBT	1	UL94V-0	.X ±0.3	.X* ±1°	MAT'L								
					.XX ±0.25	.XX*	SEE NOTE		TITLE:	USB A/F 180° DIP 14.1mm 直脚		PART NO.: USAF-04*N-1*P64			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX*	FINISH		DR:	gan 2012/6/29		DWG NO.: AII-P64			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE		CHKD:	gan 2012/6/29		SCALE	SHEET	REV.	CUSTOMER
NO	PARTS	MATERIAL	QTY	FINISHING					Q'TY		APPD:		1:1	1/1	B
															