

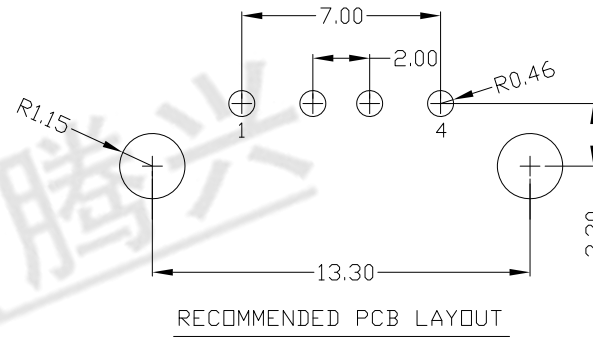
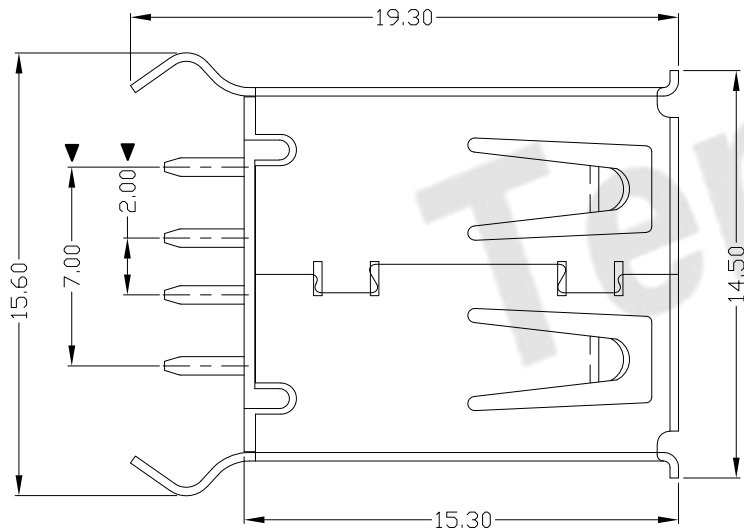


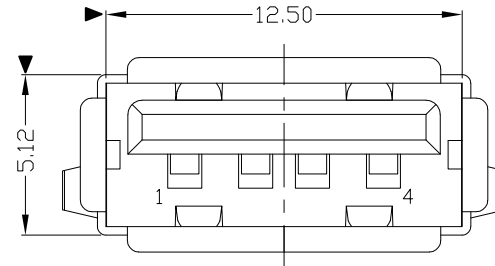

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

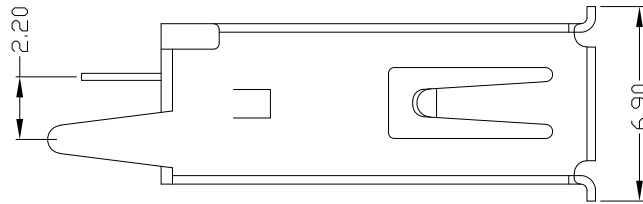

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USA F-04*N-1*P89

1: Au 1U"
6: Au 30U"

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市腾兴电子有限公司									
4	COVER	PBT+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	TITLE: USB A/F 180° DIP长体 (15.30) PART NO.: USA F-04*N-1*P89	东莞市腾兴电子有限公司 东莞市腾兴电子有限公司 东莞市腾兴电子有限公司 东莞市腾兴电子有限公司								
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X' ±1'						DR: gan 2012/7/03	DWG NO.: AII-P89			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'						CHKD: gan 2012/7/03	SCALE SHEET REV. CUSTOMER DRAWING			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'						APPD: gan 2012/7/03	1:1 1/1 B			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.		Q'TY									