

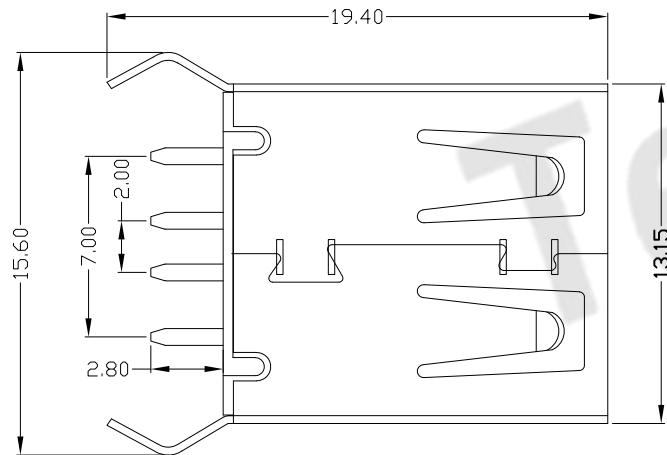
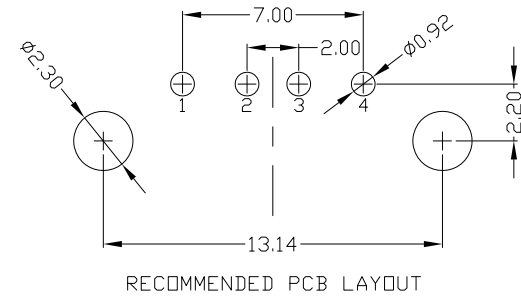


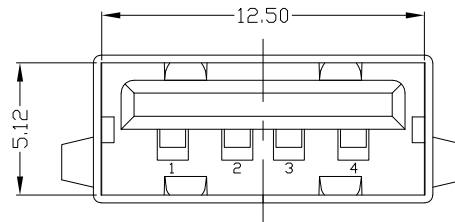

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

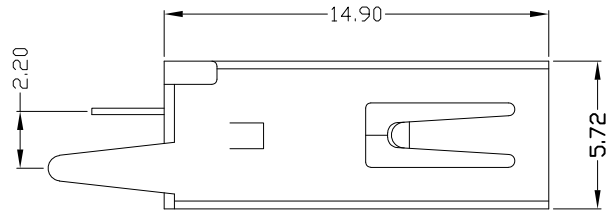

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*P804

1: Au 1U*
6: Au 30U*

W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市腾兴电子有限公司						
4	COVER	PBT+30%GF	1	UL94V-0	X. ± 0.35	X.' $\pm 2'$	MAT'L	TITLE:		PART NO.:			
3	HOUSING	PBT/LCP+30%GF	1	UL94V-0	.X ± 0.3	.X' $\pm 1'$	SEE NOTE	USB AF 180 DIP长体 (改脚无卷边)		USAF-04*N-1*P804			
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ± 0.25	.XX'	FINISH	DR: gan 2013/3/29		DWG NO.:			
1	TERMINAL	COPPER ALLOY	4	Plated Gold in Mating Area; Tin on Solder Tails	.XXX ± 0.15	.XXX'	SEE NOTE	CHKD: gan 2013/3/29		AII-P804			
							Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.

