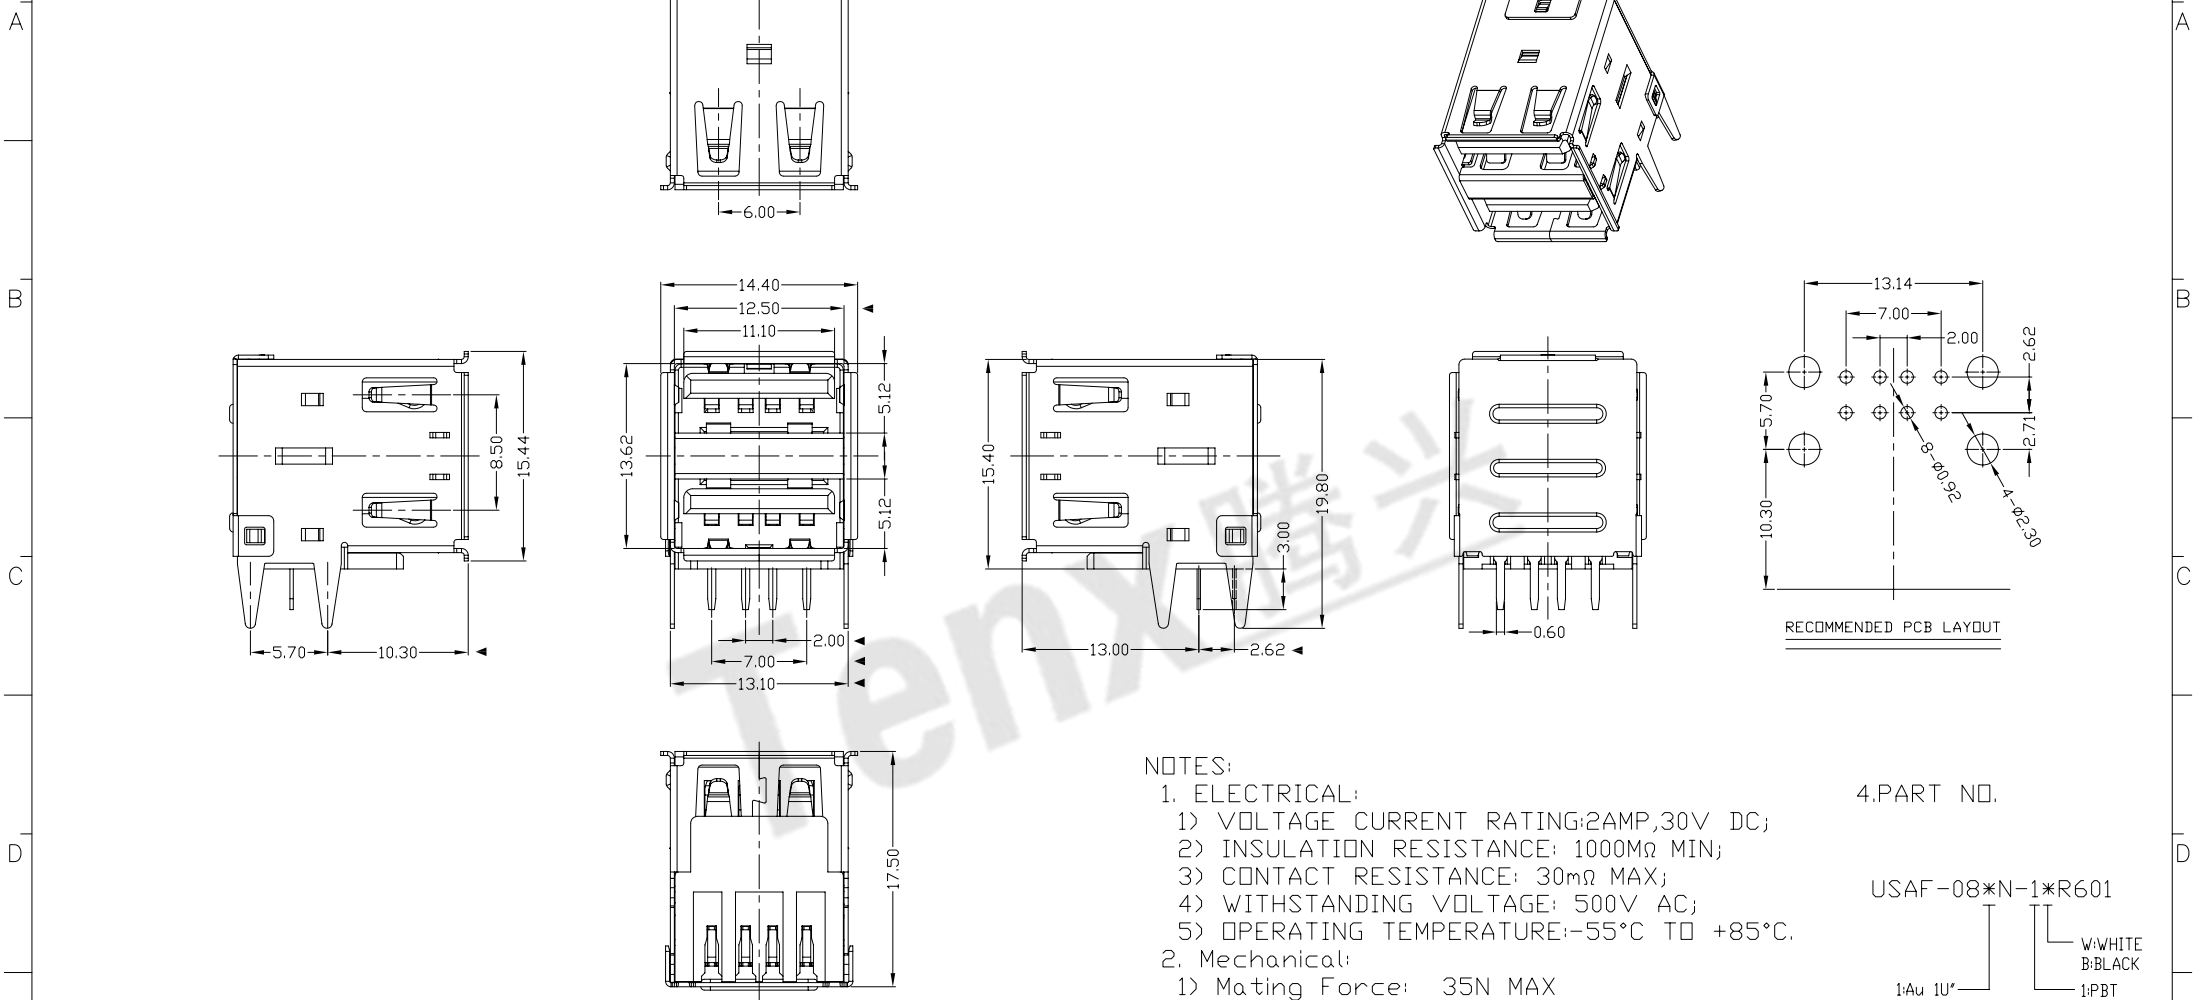

RoHS Compliant
 2002/95/EC
 Process Capable

REV	LTR	DESCRIPTION




NOTES:
 1. ELECTRICAL:
 1) VOLTAGE CURRENT RATING: 2AMP, 30V DC;
 2) INSULATION RESISTANCE: 1000MΩ MIN;
 3) CONTACT RESISTANCE: 30mΩ MAX;
 4) WITHSTANDING VOLTAGE: 500V AC;
 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2. Mechanical:
 1) Mating Force: 35N MAX
 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
 USAF-08*N-1*R601
 W: WHITE
 B: BLACK
 1: PBT
 2: PA6T
 3: PA9T
 4: LCP
 1: Au 1U*
 6: Au 30U*

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5	CLIP	COPPER ALLOY	1	PLATED NICKEL
4	BACK COVER	SPCC	1	PLATED NICKEL
3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN

X	±0.35	X.* ±2*	UNITS	东莞市腾兴电子有限公司			
.X	±0.3	.X.* ±1*	mm	TITLE: USB AF 双层半包直脚长胶半弹 PART NO.: USAF-08*N-1*R601			
.XX	±0.25	.XX*	MAT'L				
.XXX	±0.15	.XXX*	FINISH	DWG NO.: AII-R601			
SEE NOTE				CHKD: gan 2013/12/5			
SEE NOTE				APPD:			
Q'TY				SCALE: 1:1			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC				SHEET: 1/1			
				REV: B			
				CUSTOMER DRAWING			