

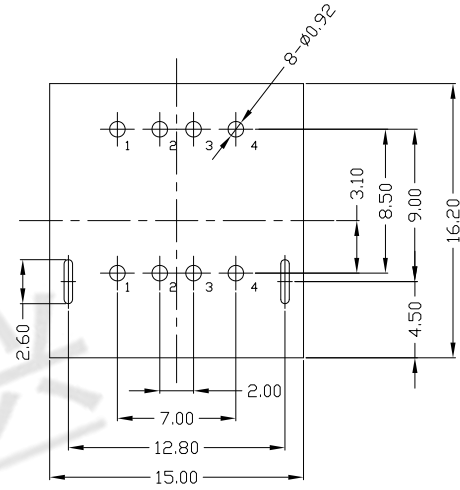


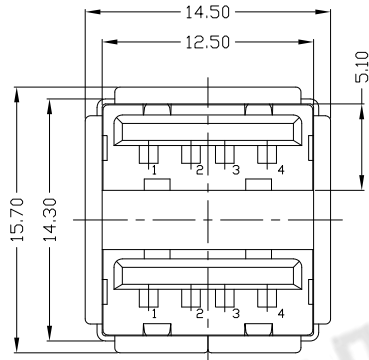


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

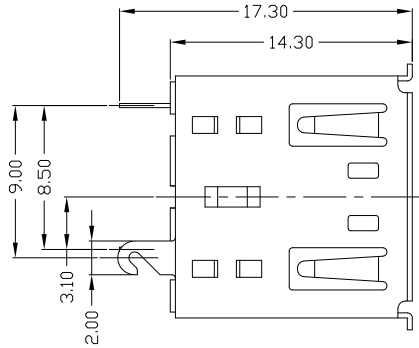


RECOMMENDED PCB LAYOUT

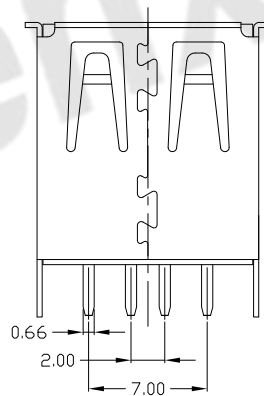

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.* ±2'	UNITS	东莞市腾兴电子有限公司																																									
4	CLIP	COPPER ALLOY	1	PLATED NICKEL	X. ±0.35	X.* ±2'	mm	<table border="1"> <tr> <td colspan="2">TITLE:</td> <td colspan="2">PART NO.:</td> </tr> <tr> <td colspan="2">USB AF 180° 双层插板短体(带勾)</td> <td colspan="2">USAF-08*N-1*P36</td> </tr> <tr> <td colspan="2">DR: gan 2014/09/26</td> <td colspan="2">DWG NO.:</td> </tr> <tr> <td colspan="2">CHKD: gan 2014/09/26</td> <td colspan="2">AII-P36</td> </tr> <tr> <td colspan="2">APPD:</td> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> <td colspan="2">CUSTOMER DRAWING</td> <td colspan="2"> </td> <td colspan="2"> </td> </tr> <tr> <td colspan="2"> </td> <td>1:1</td> <td>1/1</td> <td>B</td> <td colspan="2"> </td> <td colspan="2"> </td> <td colspan="2"> </td> </tr> </table>				TITLE:		PART NO.:		USB AF 180° 双层插板短体(带勾)		USAF-08*N-1*P36		DR: gan 2014/09/26		DWG NO.:		CHKD: gan 2014/09/26		AII-P36		APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING								1:1	1/1	B						
TITLE:		PART NO.:																																															
USB AF 180° 双层插板短体(带勾)		USAF-08*N-1*P36																																															
DR: gan 2014/09/26		DWG NO.:																																															
CHKD: gan 2014/09/26		AII-P36																																															
APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING																																												
		1:1	1/1	B																																													
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X.* ±1'	MAT'L																																										
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX.*	SEE NOTE																																										
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XXX ±0.15	.XXX.*	FINISH																																										
							Q'TY																																										

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

