

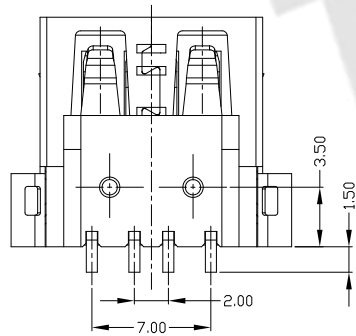
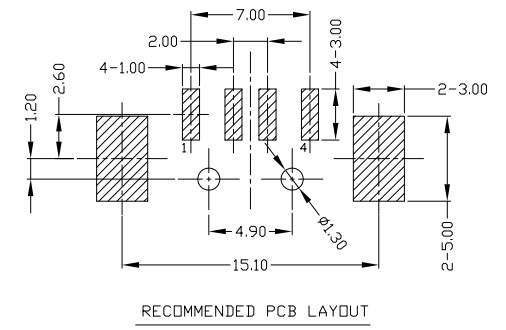

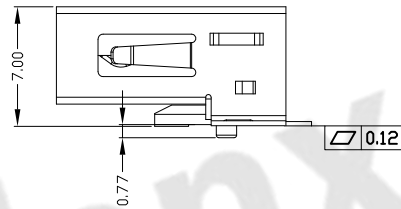




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

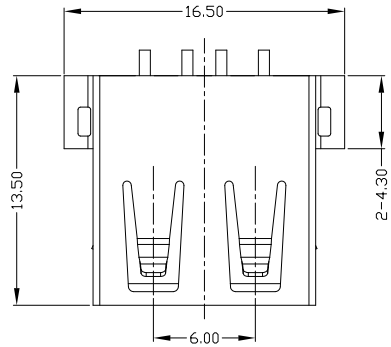

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*V609

1:Au 1U*
6:Au 30U*
W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	LCP+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

UNITS mm			
MAT'L SEE NOTE			
FINISH SEE NOTE			
Q'TY			
东莞市腾兴电子有限公司			
TITLE: USB AF SMT型 方脚全贴式无卷边 1.2柱子(端子外露1.50)		PART NO.: USAF-04*N-4*V609	
DR: gan 2016/04/07		DWG NO.: AII-V609	
CHKD: gan 2016/04/07		SCALE: 1:1	SHEET: 1/1
APPD:		REV: B	CUSTOMER DRAWING