

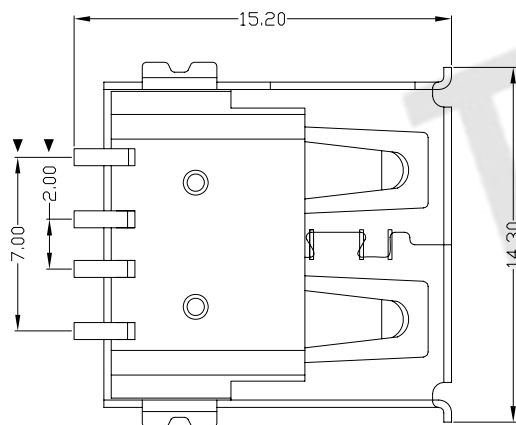
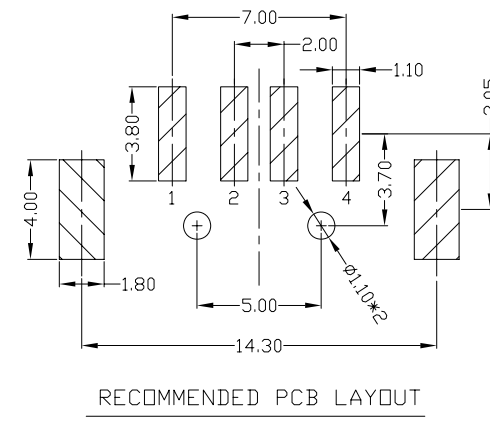


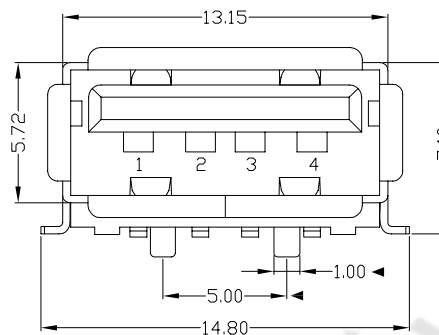

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

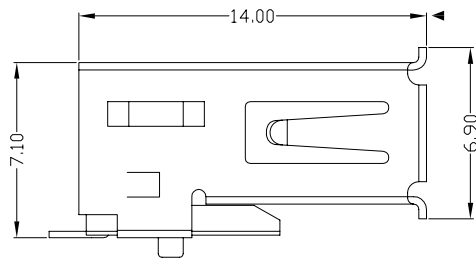

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*V805

1:Au 1U"
6:Au 30U"

W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市腾兴电子有限公司						
3	HOUSING	LCP/PBT+30%GF	1	UL94V-0	X. ± 0.35	X.' $\pm 2^*$	MAT'L	TITLE:		PART NO.:			
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.X ± 0.3	.X' $\pm 1^*$	SEE NOTE	USB AF SMT 180度 鱼叉脚 胶柱 1.0mm		USAF-04*N-4*V805			
1	TERMINAL	COPPER ALLOY	4	Plated Gold in Mating Area; Tin on Solder Tails	.XX ± 0.25	.XX'	FINISH	DR: gan 2013/4/16		DWG NO.:			
					.XXX ± 0.15	.XXX'	SEE NOTE	CHKD: gan 2013/4/16		AII-V805			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.		Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
								1:1	1/1	B			