

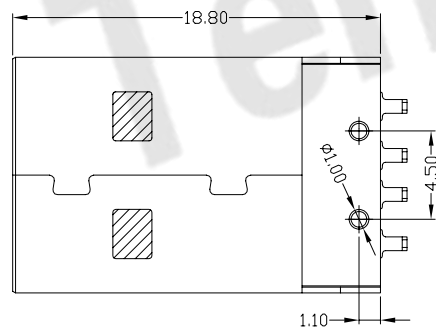
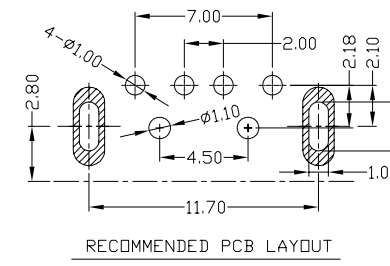

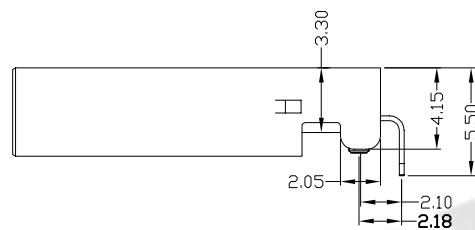




RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

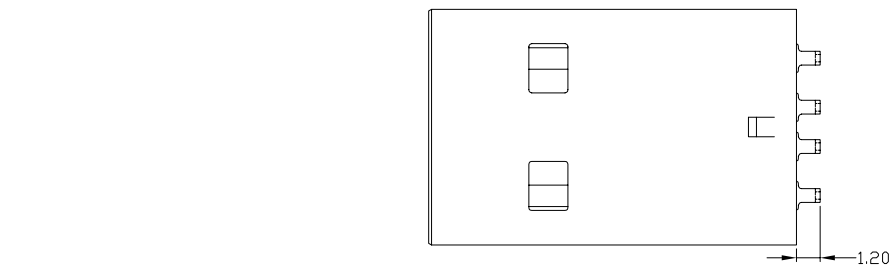

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAM-04\*N-1\*R83

1Au 10"  
6Au 30U"  
W: WHITE  
B: BLACK  
1-PBT  
2-PA6T  
3-PA9T  
4-LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	mm	东莞市腾兴电子有限公司				
3	HOUSING	PBT/LCP+30%GF	1	UL94V-0	.X ±0.3	.X* ±1*	MAT'L	SEE NOTE	TITLE:	USB AM 90° DIP 短体(短脚)			
2	SHELL	SPCC	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	SEE NOTE	DR:	gan 2013/5/4			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	Q'TY	SEE NOTE	CHKD:	gan 2013/5/4			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.					APPD:				SCALE	SHEET	REV.	CUSTOMER DRAWING	
									1:1	1/1	B		