



RoHS Compliant
2002/95/EC

MODEL CODE





SK-14D12-GFB

Knob Type
GFB
VAC

L(mm)
~



REV.	ECN.	NO.	APPD.

DIMENSIONS

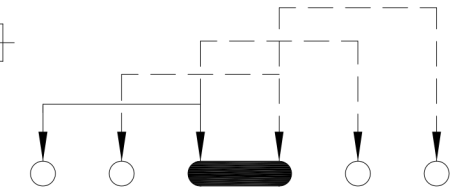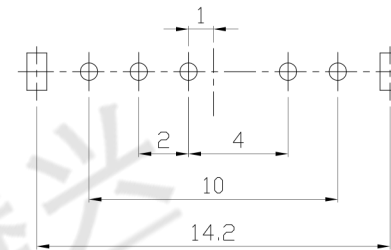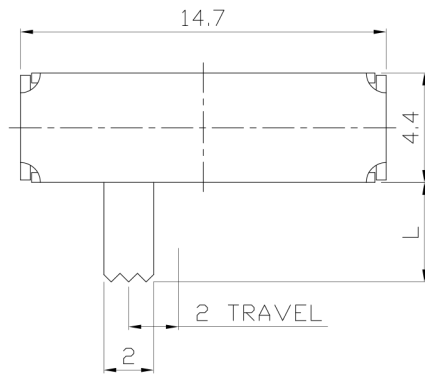

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

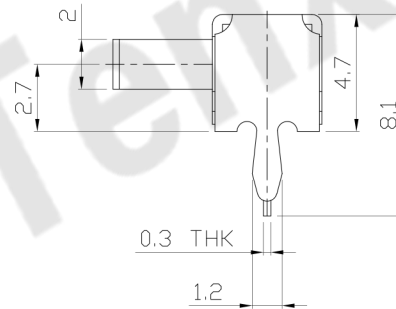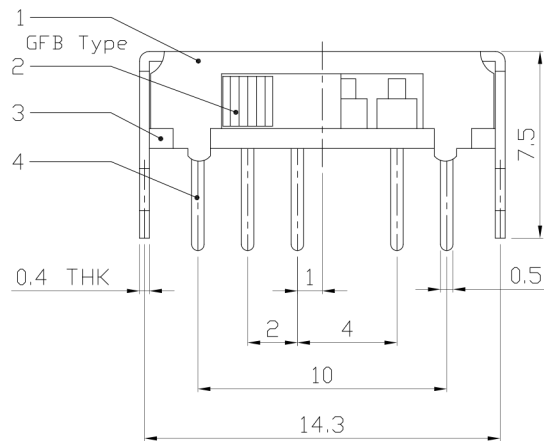

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					
7					
6	SPRING PLATE	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED	OVER 1.5mm: ±0.2mm
4	TERMINAL	BRASS STRIP	5	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	KNOB	POM	1	BLACK	
1	FRAME	STEEL STRIP	1	Ni PLATED	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

UNITS	mm	东莞市腾兴电子有限公司			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	SLIDE SWITCH / HORIZONTAL		
Q'TY	SEE NOTE	DR:	Ricky 2016/06/23		
		CHKD:	Ricky 2016/06/23		
		APPD:			
		PART NO.:	SK-14D12		
		DWG NO.:	ADL-14D12		
		SCALE	SHEET	REV.	CUSTOMER DRAWING
		3:1	1/1	A	