





RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS


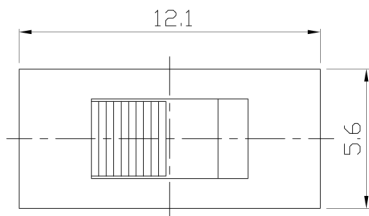


MODEL CODE

SS-12F44-GBG

Knob Type
GBG
VAA

L(mm)
~





P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

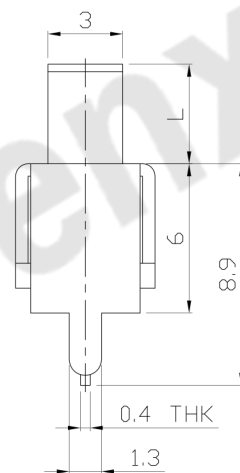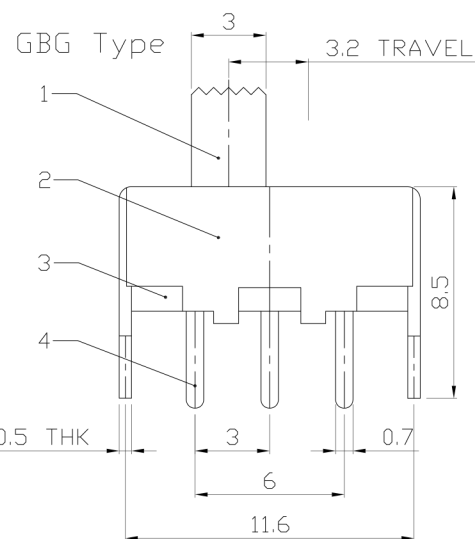

WITHIN 1.5mm: ±0.1mm

UNITS mm

OVER 1.5mm: ±0.2mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

APPD:

东莞市腾兴电子有限公司

TITLE: SLIDE SWITCH / VERTICAL

PART NO.: SS-12F44

DR: Ricky 2015/07/09

DWG NO.: ADL-12F44

CHKD: Ricky 2015/07/09

SCALE SHEET REV. CUSTOMER DRAWING

APPD:

4:1 1/1 A

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS STRIP	1	Ag PLATED
4	TERMINAL	BRASS STRIP	3	Ag PLATED
3	CASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	POM	1	BLACK