



RoHS Compliant
2002/95/EC

MODEL CODE





SS-13D10-GFB

| |
|-----------|
| Knob Type |
| GFB |
| VAC |

| |
|-------|
| L(mm) |
| ~ |



| | | | |
|------|------|-----|-------|
| REV. | ECN. | NO. | APPD. |
| | | | |
| | | | |

DIMENSIONS

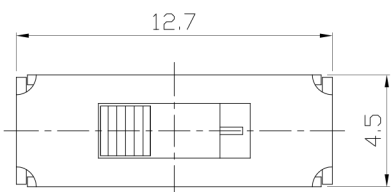

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

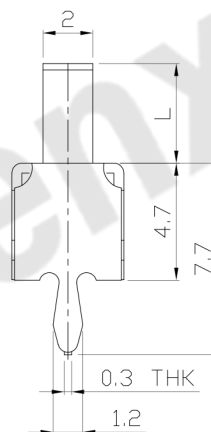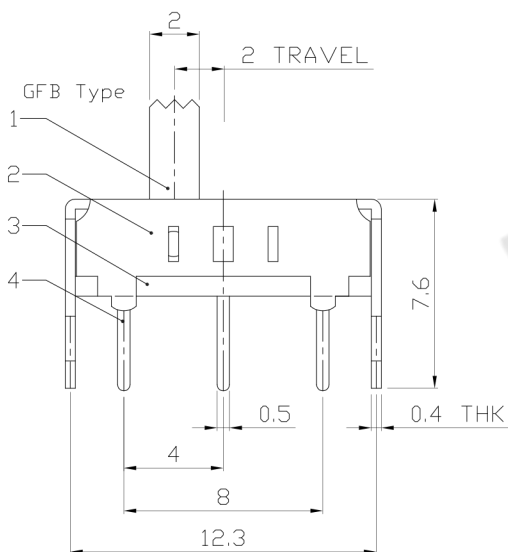

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | |
|------------------------|--------------|
| RATING | 0.3A 50V DC |
| CIRCUIT | 1P3T |
| CONTACT RESISTANCE | 100mΩ MAX. |
| TIMING | NON-SHORTING |
| TRAVEL | 2mm |
| OPERATING FORCE | 250±100gf |
| OPERATING LIFE(cycles) | 10,000 |

| | | | | | |
|-----|--------------|----------------|------|-----------|--|
| 8 | | | | | |
| 7 | | | | | |
| 6 | SPRING PLATE | SUS | 1 | NATURAL | |
| 5 | CONTACT CLIP | PBS STRIP | 1 | Ag CLAD | |
| 4 | TERMINAL | BRASS STRIP | 3 | Ag CLAD | |
| 3 | BASE | PHENOLIC RESIN | 1 | NATURAL | |
| 2 | FRAME | STEEL STRIP | 1 | Ni PLATED | |
| 1 | KNOB | POM | 1 | BLACK | |
| NO. | PARTS | MATERIAL | Q'TY | FINISHING | |

| | |
|----------------------|----------|
| WITHIN 1.5mm: ±0.1mm | UNITS mm |
| OVER 1.5mm: ±0.2mm | MAT'L |
| | SEE NOTE |
| | FINISH |
| | SEE NOTE |
| | Q'TY |
| | |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

东莞市腾兴电子有限公司

| | | | |
|--------|-------------------------|------------------|-----------|
| TITLE: | SLIDE SWITCH / VERTICAL | PART NO.: | SS-13D10 |
| DR: | Ricky 2015/07/07 | DWG NO.: | ADL-13D10 |
| CHKD: | Ricky 2015/07/07 | SCALE | 4:1 |
| APPD: | | SHEET | 1/1 |
| | | REV. | A |
| | | CUSTOMER DRAWING | |