

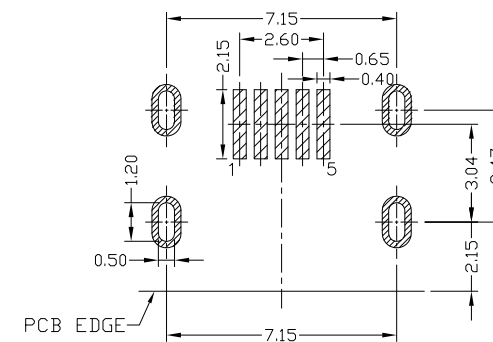







RoHS  
Compliant  
2002/95/EC

Halogen Free

REV.	ECN. NO.	APPD.



RECOMMENDED PCB LAYOUT

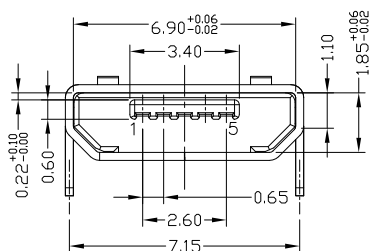

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
  - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05\*N-4BHUA539  
 1:Au 1U\* W:WHITE  
 6:Au 30U\* B:BLACK  
 T:TIN 1:PBT  
 N:NICKEL 2:PA6T  
 3:PA9T  
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市腾兴电子有限公司						
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	X. ±0.35	X.* ±2*	SEE NOTE	TITLE: MICRO USB B TYPE F 5P 插板7.2 无柱 脚长1.1四脚全插 无导位加长0.75		PART NO.: MUYF-05XN-4BHUA539			
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X* ±1*						SCALE	SHEET
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX*	SEE NOTE	DR: Ricky 2018/9/10		DWG NO.: AII-HUA539			
					.XXX ±0.15	.XXX*	SEE NOTE	CHKD: Ricky 2018/9/10					
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		Q'TY	APPD:		5:1	1/1	A	DRAWING