



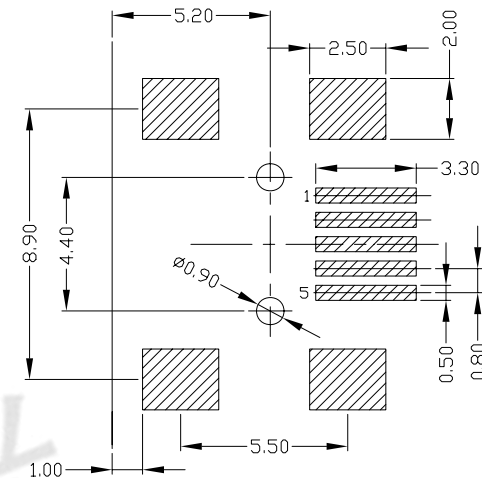

RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

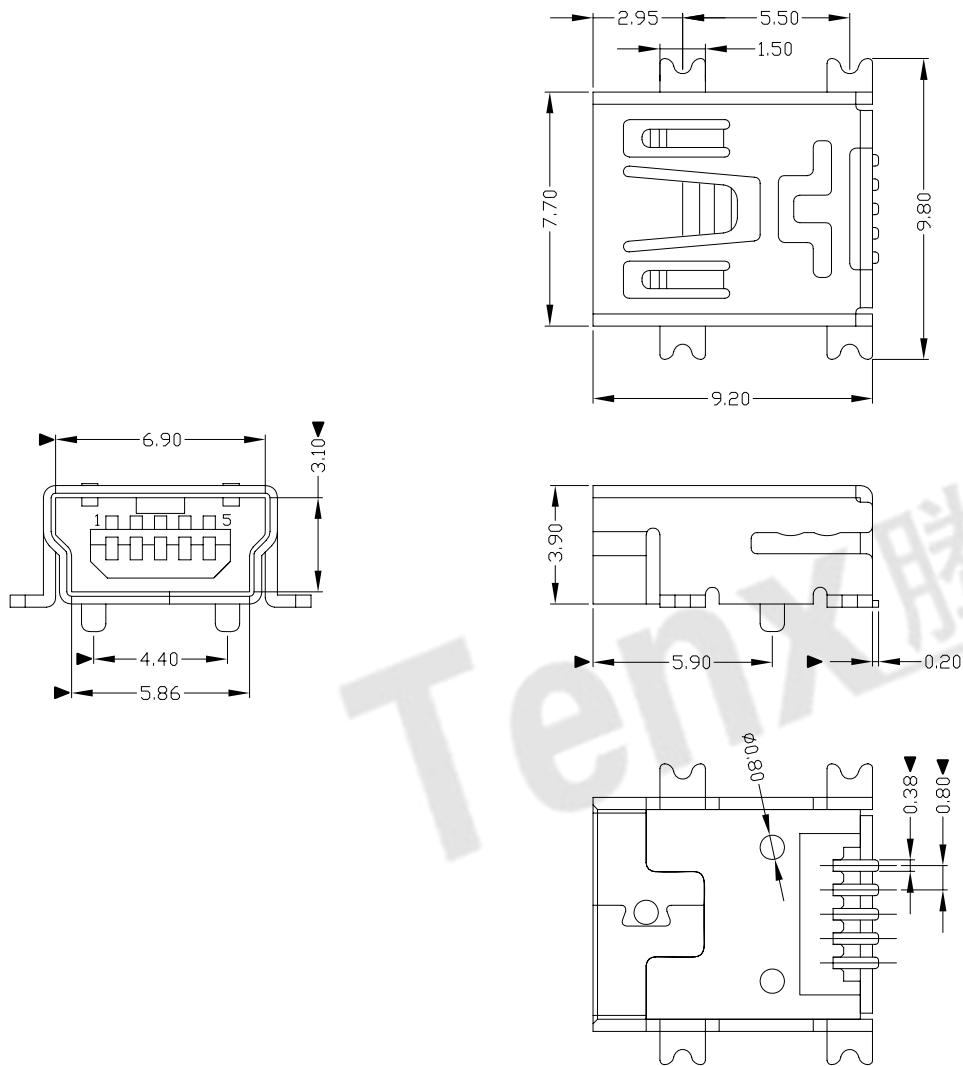

RECOMMENDED PCB LAYOUT

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
  - INSULATION RESISTANCE: 100M $\Omega$  MIN;
  - CONTACT RESISTANCE: 50m $\Omega$  MAX;
  - WITHSTANDING VOLTAGE: 300V AC;
  - OPERATING TEMPERATURE:-55°C TO +85°C.
- Mechanical:
  - Mating Force: 30N MAX
  - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- PART NO.

MUBF-05\*N-4BH803

1:W:WHITE  
2:B:BLACK  
1:PBT  
2:PA6T  
3:PA9T  
4:LCP

1:1Au 1U"  
6:1Au 30U"

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. $\pm 0.35$	X.' $\pm 2^*$	UNITS	mm	东莞市腾兴电子有限公司					
3	HOUSING	LCP	1	UL94V-0	.X $\pm 0.3$	.X' $\pm 1^*$	MAT'L	SEE NOTE	TITLE: MINI USB 5P/F SMT B型 (端子加长0.2/1.0柱)		PART NO.: MUBF-05*N-4BH803			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX $\pm 0.25$	.XX'	FINISH	SEE NOTE	DR: gan 2012/7/02		DWG NO.: AII-H803			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX $\pm 0.15$	.XXX'	Q'TY	SEE NOTE	CHKD: gan 2012/7/02		SCALE	SHEET	REV.	CUSTOMER DRAWING
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.								APPD:		1:1	1/1	B		