




RoHS Compliant
2002/95/EC

PART NO: RA - - - -

REV.	ECN.	NO.	APPD.

DIMENSION:(UNIT:mm/inches)

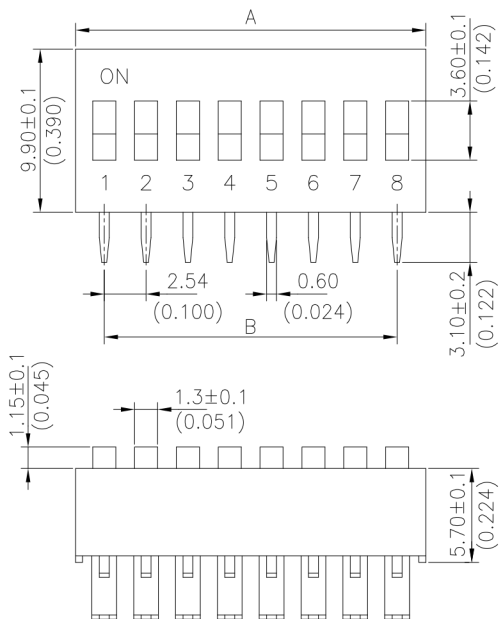


Actuator Type:
 R = Recessed Actuator

Color of cover:
 BL = Blue
 R = Red
 BK = Black

Seal:
 T = Top Tape Sealed


Number of positions:

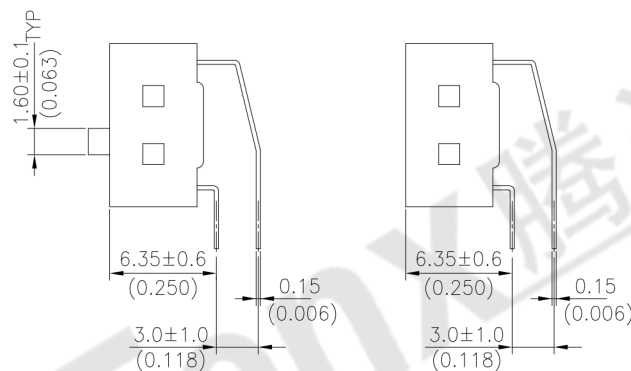


RA SERIES

RAR SERIES


Prod No.	No.ofPOS	DIM.A	DIM.B
RA/RAR-02	02	6.08(0.239)	2.54(0.100)
RA/RAR-03	03	8.92(0.351)	5.08(0.200)
RA/RAR-04	04	11.16(0.439)	7.62(0.300)
RA/RAR-05	05	13.70(0.539)	10.16(0.400)
RA/RAR-06	06	16.24(0.639)	12.70(0.500)
RA/RAR-07	07	19.08(0.751)	15.24(0.600)
RA/RAR-08	08	21.32(0.839)	17.78(0.700)
RA/RAR-09	09	24.16(0.951)	20.32(0.800)
RA/RAR-10	10	26.40(1.039)	22.86(0.900)
RA/RAR-12	12	31.48(1.239)	27.94(1.100)

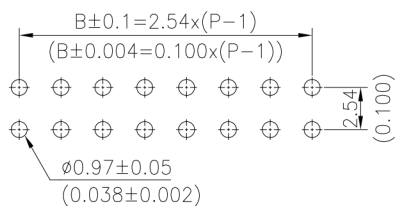

P.C.B. LAYOUT

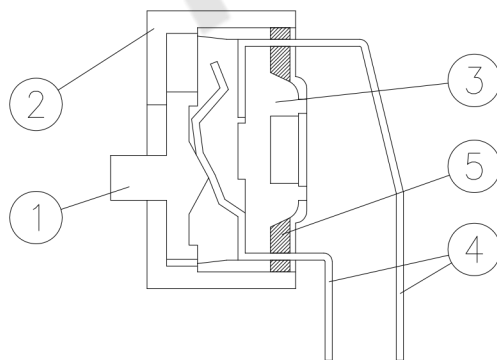

CONSTRUCTION



CIRCUIT DIAGRAM

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 PBT THERMOPLASTIC	WHITE
2	COVER	UL94V-0 PBT THERMOPLASTIC	BLUE, RED.BLACK
3	BASE	UL94V-0 PBT THERMOPLASTIC	BLACK
4	TERMINAL	PHOSPHOR BRONZE	GOLD PLATING
5	POTTING	EXPOXY	BLACK

尺寸範圍	容許值	UNITS mm(IN)	东莞市腾兴电子有限公司					
0-4	±0.05	MAT'L						
4-16	±0.1	SEE NOTE	TITLE: RIGHT ANGLE TYPE DIP SWITCH	PART NO.: RA/RAR SERIES				
16-50	±0.15	FINISH	DR: Ricky 2014/04/08	DWG NO.: ATR-RA				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	CHKD: Ricky 2014/04/08	SCALE SHEET		REV.	CUSTOMER DRAWING
			APPD:	1:1	1/1	A		